

photobook+

Exclusively for DNP Printers

User manual

Available on Windows XP SP3, Windows 7, Windows 8/8.1, Windows 10

Summary

Summary.....	2
License Agreements.....	3
Photobook + Software Licensing Agreement	3
Acknowledgments	5
ICC Profiles	5
Introduction.....	6
Products of Photobook +:	6
Quick start.....	7
Input Devices	8
Images	9
How to Load Images?.....	9
How to Edit Images?	10
How to enhance all images at once?	14
Products.....	15
Prints	15
Double Sided Prints.....	20
Panoramic Prints	21
Calendars	25
Greeting cards.....	30
Photobook: 4X4 Square	35
Photobook: 8x12 Landscape	39
Page editing	44
Page commands.....	44
Layout editing	47
Orders (Order History).....	48
How to print an order from 'Photobook + Home version'?	49
Settings – General	51
Initial parameters.....	51
Printer Parameters.....	52
Products	53
Check for updates	54
Frames.....	55
Themes.....	58
Diagnostics.....	61
Orders in process	61
Export logs	61
Printer status.....	61
Supported products	63
Supported Configurations.....	64
Troubleshooting	65

License Agreements

Photobook + Software Licensing Agreement

PLEASE READ THE FOLLOWING TERMS AND CONDITIONS CAREFULLY BEFORE USING THIS SOFTWARE. USING THIS SOFTWARE INDICATES YOUR ACCEPTANCE OF THESE TERMS AND CONDITIONS. IF YOU DO NOT AGREE WITH THESE TERMS AND CONDITIONS, PROMPTLY RETURN THIS SOFTWARE TO YOUR SUPPLIER.

This Software License Agreement is a legal document between you (a single entity) and FIT Engineering S.r.l. (the "Licensor") for the Photobook + Software (the "Software").

The Software includes the installed software, the associated media, any printed materials, and any electronic documentation. By using the Software, you agree to the terms of this Software License Agreement. The Licensor grants you a non-exclusive, non-transferable license to use one copy of the Software in object code only.

Ownership Retained By Licensor

FIT Engineering S.r.l. owns all title and copyrights in and to the Software and the Licensor has the full right and authority to grant the license granted herein. Your license does not give you any title or ownership in the Software, nor is it a sale of any rights in the Software. The only right granted to you is the right to use the Software in accordance with the terms of this Software License Agreement. All rights not specifically granted to you under this Software License Agreement are reserved by the Licensor.

You may make only a single copy of Software as a backup copy, provided that it includes all notices and markings, including copyright, trademark and other proprietary notices as on the original. Such backup copy of the Software may not be in use at any time unless the original Software is damaged beyond use, and it must remain in your possession and control.

You may not copy the software onto any public network. You may not, and you may not allow others to modify, disassemble, decompile, translate, reverse engineer, reproduce, make derivative works of or enhance the Software. You may not, and you may not allow others to rent, lease, sell, and sublicense or otherwise transfer the Software to any other person.

In addition to any other rights it may have, the Licensor may terminate this Software License Agreement if you fail to comply with the terms and conditions hereof. In such event, you must cease all use of the Software and destroy all copies of the Software and all of its component parts.

At the Licensor's sole discretion, the Licensor may from time to time provide you with updates to the Software. Any such updates shall become part of the Software licensed to you hereunder and subject to all of the terms and conditions of this Software License Agreement.

Disclaimer of Warranties

The Licensor expressly disclaims any and all warranties relative to the Software. THE SOFTWARE IS PROVIDED "AS IS," WITH- OUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR OF PARTICULAR PURPOSE AND NON-INFRINGEMENT AND THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LICENSED PRODUCT IS WITH YOU.

Limitation of Liability

In no event shall the Licensor be liable for any direct, special, incidental, indirect or consequential damages whatsoever to you including, without limitation, damages for loss of profits, sales or data or for business interruption) arising out of the use of or inability to use the Software, even if the Licensor has been advised of the possibility of such damages. In any event, the Licensor's entire liability under any provision shall be

limited to the amount actually paid by you for the Software. Because some states and jurisdictions do not allow the exclusion or limitation of liability, the above limitation may not apply to you.

If any provision of the Software License Agreement is declared by a court of competent jurisdiction to be invalid for any reason, such invalidity shall not affect the remaining provisions hereof.

Governing Law

This Software License Agreement shall be governed by the laws of Italy without regard to conflict of laws principles.

Term

This License Agreement is effective until terminated. You may terminate this License Agreement by returning the Licensed Product to Licensor. Licensor may terminate this License Agreement if you breach any of the terms and conditions. Upon termination of this License Agreement for any reason, you shall return the Licensed Product to Licensor. All provisions of this Agreement relating to disclaimers of warranties, limitation of liability, remedies, or damages, and Licensor's proprietary rights shall survive termination.

YOU ACKNOWLEDGE YOU HAVE READ AND UNDERSTAND THIS AGREEMENT AND AGREE TO BE BOUND BY ITS TERMS. YOU FURTHER AGREE THAT THIS AGREEMENT IS THE COMPLETE AND EXCLUSIVE STATEMENT OF THE AGREEMENT BETWEEN YOU AND LICENSOR, AND SUPERSEDES ANY PROPOSAL OR PRIOR AGREEMENT, ORAL OR WRITTEN, AND ANY OTHER COMMUNICATIONS RELATING TO THE SOFTWARE ADDRESSED IN THIS AGREEMENT.


Acknowledgments

This document is for informational purposes only. FIT Engineering S.r.l. makes no warranties, expressed or implied, as to the information in this document.

ICC Profiles

Dai Nippon Printing Co., Ltd. (DNP) provided ICC profiles implemented into Photobook + software.

Introduction

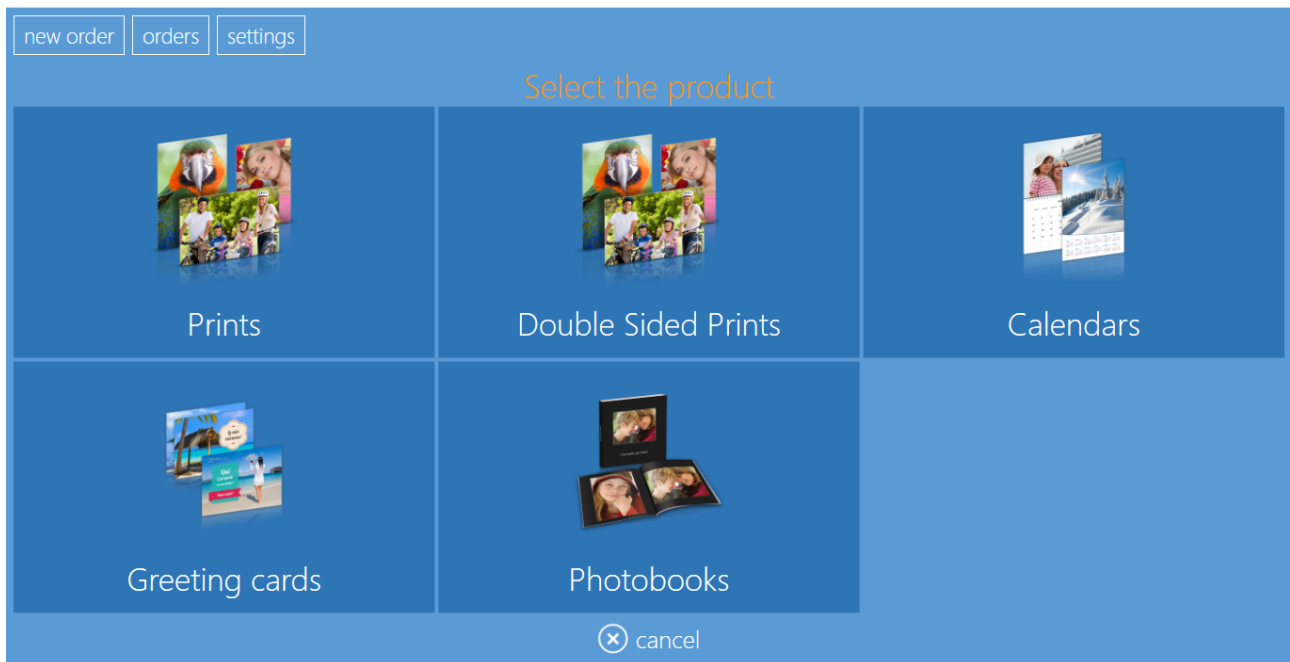






Photobook + is a software system to make Creative Photo Products like Photobook, Calendar, Greeting Cards using DS80DX Printer or Simple prints with other DNP printers like DS820, DS620, DS40, DS80, RX1 and RX1HS.

It supports all types of media compatible with DS820 printer: SD, PP and A4 media.

A variety of products can be created, including photobooks from 6x8" to 8x12" and in square format. Further, prints, calendars and greeting cards can be produced both single- and double-sided.

The software system allows selection and editing of digital images to be printed with DNP printers only.

Products of Photobook +:

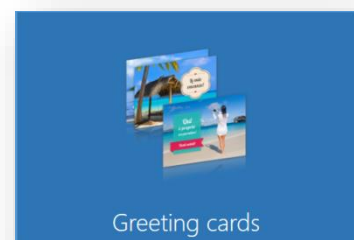

Quick start

System setup

Before you start working with the software, connect and switch on DS 80 DX Printer and some other DS Printer if necessary to have more print products available.

Software will automatically display only products that can be printed with connected printers and loaded media.

Make sure the USB key with Software License Key is inserted into your PC.



Note:

If the License dongle is not connected, the software will display the following message:

The dongle must be always connected to use the software. Please insert the dongle to resume the work.

Quit application

When the License dongle is connected to the system, the above message will disappear automatically within a few seconds.



Note:

If there is no DNP Printer connected, the software will display the following message:

No products available. Please verify that the printers are properly connected to the system.

refresh

When the printer is connected to the system, the above message will disappear automatically within a few seconds and then the software will display the products window as per the connected printer.

Where it prints

With photobook + you can print directly with DNP printers, without installing any drivers.

Supported DNP printers are DS80DX, DS40, DS80, RX1, RX1HS, DS620 and DS820.

Simply connect printers to your PC running photobook + and they will automatically be recognized by the software. A green button will appear at top right of the screen with printer/printers minimum details.

Color profile: photobook + uses most recent color profiles provided by DNP. You can also enter a color profile by entering settings / printer parameters.

Control panel and software management




There are 3 buttons on top left area:

- New Order: A new process will start from first step, product selection;
- Orders: Access to the control panel of digital orders i.e. Orders History of pending and completed;
- Settings: Access to the basic configuration of the software like language, measuring system, printers, available products, software updates, diagnostics.

Input Devices

Print orders

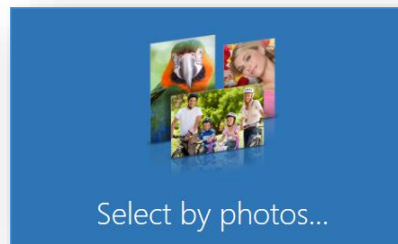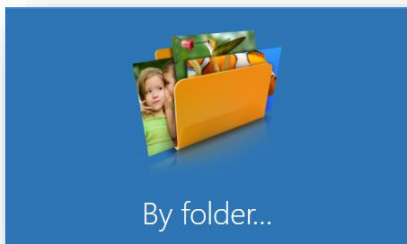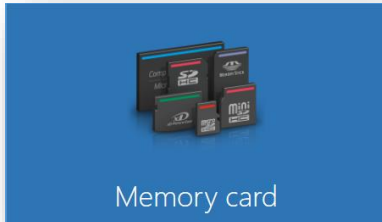

User can choose images to be printed from various digital sources such as memory card, CD, DVD, USB drive, Local and Network Folders.



Note:

Accessing images from Shared Folders or accessing via Network it's a part of Windows function; please refer appropriate support if there is a issue.

Customize your digital order

-  User can select the final product: Single Side Prints and Dual Sided Prints, Panoramic Prints (**with DS620 and DS820 printers only**), Calendars, Greeting Cards and Photobooks.
-  User can apply simple adjustments individually for each image and can select backgrounds and layouts for creative products.

Images

How to Load Images?

Images can be loaded from various digital sources: Memory Card, USB devices, CD/DVD, Folder and Select by Files.

Image loading screen will appear after product selection.



Insert digital media into appropriate loading slot of the PC.

Select on the screen from which digital media type you want to load images.

The visualization criteria depend on the media type:

- ✚ Memory card: it will show all images stored in the media. Select images and press next to load selected images.
- ✚ USB device and CD/DVD: it will show folders of the media. By selecting a folder, images contained in that folder will be displayed. Select images and press next to load selected images.
- ✚ By folder: it will open Windows file explorer. Browse and select folder with images. All images of that folder will be loaded
- ✚ Select by photos...: it will open a new loading page with multiple possibilities to load images: one by one, all images in a folder and also by simply drag and drop images into loading page area.

How to Edit Images?

After loading, images can be adjusted with multiple tools: crop, correct, red eye, filters. Also text and date stamp can be added at this stage.

During prints workflow, click on EDIT or on CROP. Other products will present edit page during workflow.



- Edit



- ✓ Increment Decrement Copies
- ✓ Fit to Image Or Fit to Paper
- ✓ To Duplicate the selected Image
- ✓ Change Product

- Crop



- ✓ Right Left Top Bottom: Move Crop
- ✓ Zoom : + or -
- ✓ Rotate: To rotate the Image
- ✓ Fit the Photo: Fit the photo to the selected size, with a white border
- ✓ Reset: To Reset the modified changes

Click and drag on yellow rectangle or use the buttons below to use only a portion of an image.

Note:

By default the Framing adoption set to 'Fit to Image (Images are cropped)' but 'Fit the Photo' button control provides full image with White Border

- Correct



Auto Color Correction

- ✓ Auto: On/Off switches click to enable Auto CC for the selected image.
- ✓ Auto All: On/Off switches click to enable Auto CC for the all the images in the directory.
- ✓ Manual: Enable to edit the image colors manually.

Clicking on AUTO the selected image will be automatically adjusted by local density correction.

- Fine rotation




Straighten

- ✓ Straighten Clockwise
- ✓ Straighten Anti-Clockwise
- ✓ Undo Straighten

By clicking on fine rotation buttons, image can be rotated by small angle.

- Red Eye

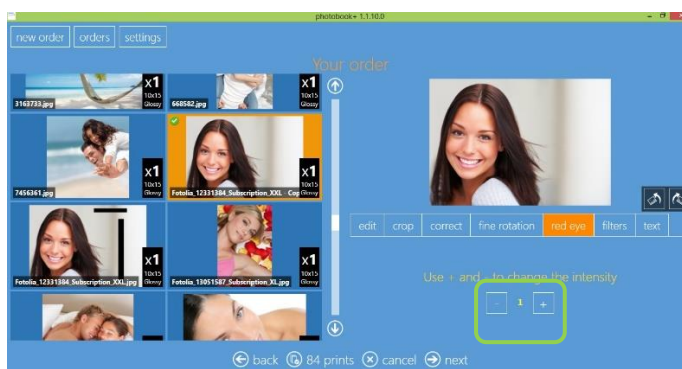

Red Eye

- ✓ Click on the image to display the RedEye Control
- ✓ Select the correction area
- ✓ Click on "+" to apply (the maximum count is 3)
- ✓ **Note:** By default Auto Red Eye correction is enabled.

Click on "+" button and wait a moment, if red eye is not automatically corrected click on "+" button again. Maximum correction level is 3.

- Filters





Color Filters

- ✓ There are various numbers of color filters available.
- ✓ Select image, choose the filter from the list & it'll apply automatically.
- ✓ FILTERS: BW, Sepia, Celsius, Food, Portrait etc....
- ✓ There are 14 filters are available to choose.

By selecting a filter preview on bottom right area, the relevant filter will be applied to the image. Scroll bar will show all available filters.

- Text

Click on the 'Add text' button to add text on the image or anywhere on the template.

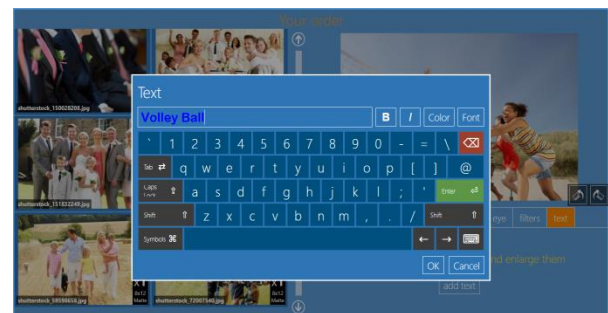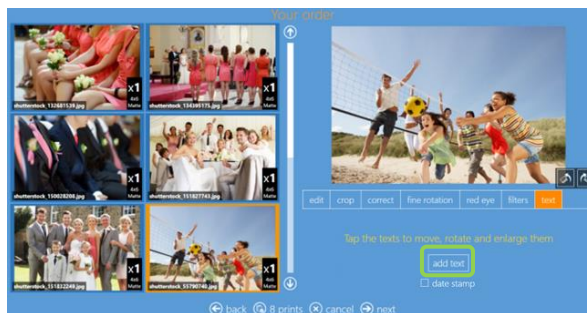


- ✓ Click on 'add text'
- ✓ Enter the desired text in the textbox

In the same window, we can decide the color, font type, font size, symbols etc...

- ✓ Press Enter or Ok to display the text on the image
- ✓ Select the text to position the text by dragging
- ✓ Select the text for further modification by clicking the yellow color 'Pencil' control
- ✓ Select the text & click on the 'Bin' symbol for deleting the text

✚ Check the Date stamp box to add the date on the image

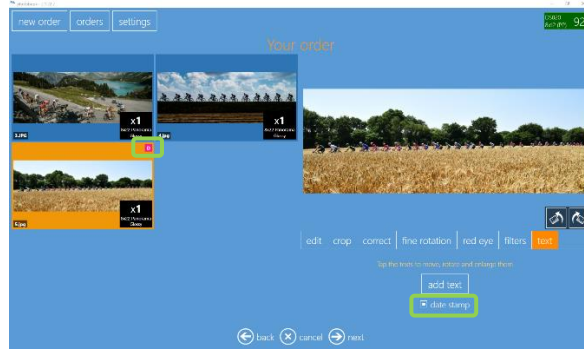

To add one Date stamp on a specific image:

- ✓ Check the 'date stamp' in the text tab
- ✓ The letter D will appear in a pink square on the selected image to show that the date stamp will be applied on this specific picture



To add date stamp to all pictures of the order:


- ✓ Click on 'change all' in the preview page
- ✓ Click on 'date stamp'. All the images will have the date stamp when printed. The letter D in the right corner of the image informs you that the date stamp will be applied.



How to enhance all images at once?

After loading, images can be auto corrected all at once

- ✓ Click on change all
- ✓ Click on auto all
- ✓ A green check appears on each picture on the top left corner: all the images have been enhanced automatically by the software

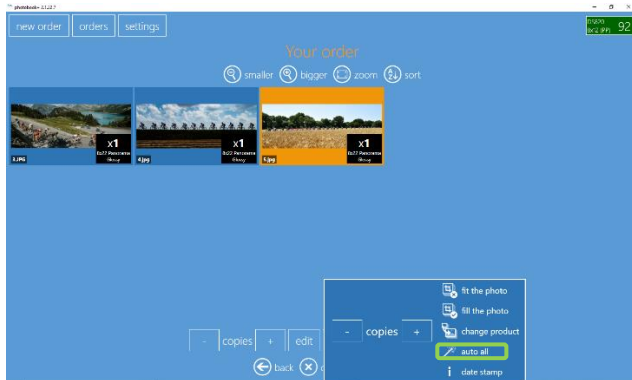


Products

Prints, Double Sided Prints, Panoramic Prints, Calendars, Greeting cards and Photobooks can be created with simple workflow procedures.


Prints

This is the Workflow of creating and printing Single Sided Print product.

1) Select Prints

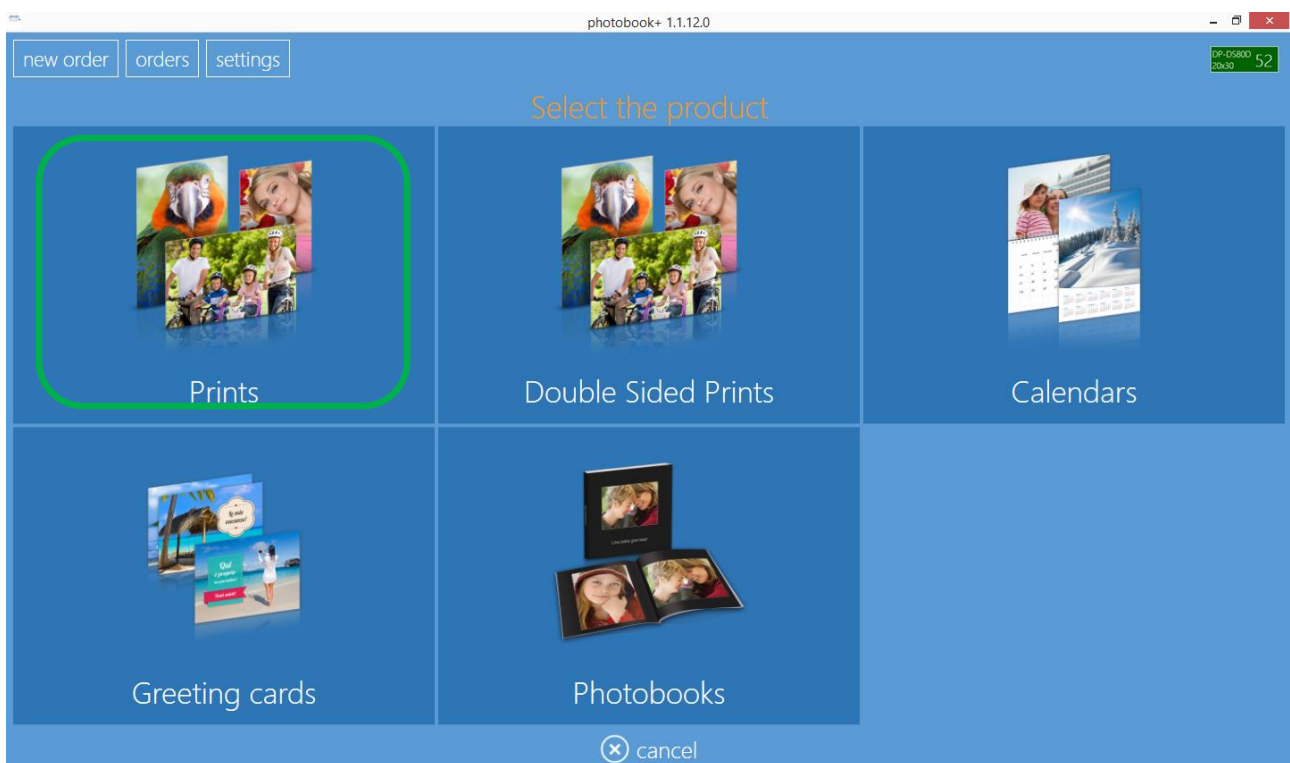

2) Select media where images are located, as an example a folder with images

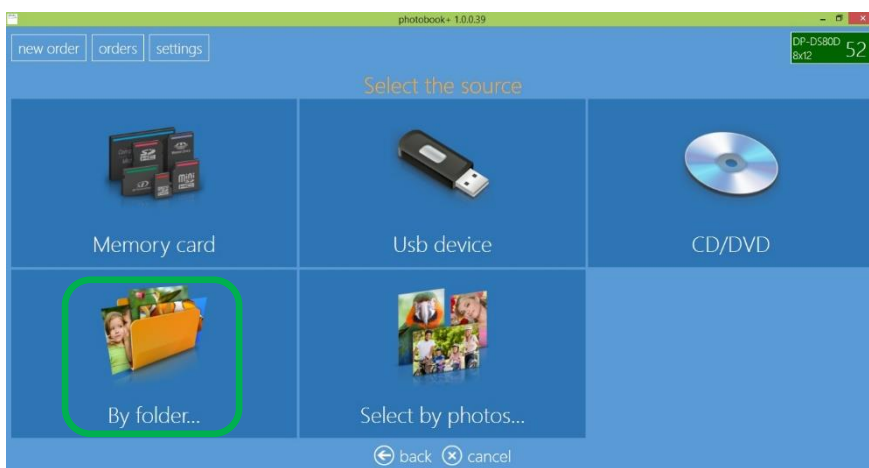


3) Select images




By pressing “+” or “-” sign the print quantity can also be entered at this stage

4) Select product

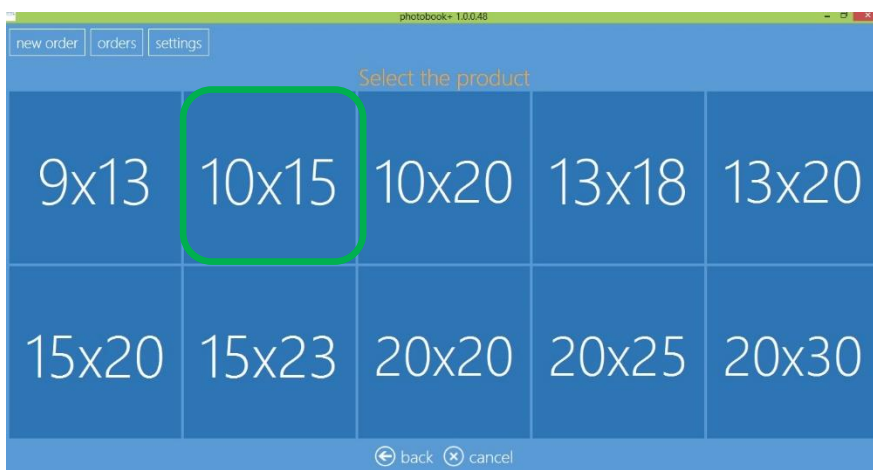

5) Select paper finish type

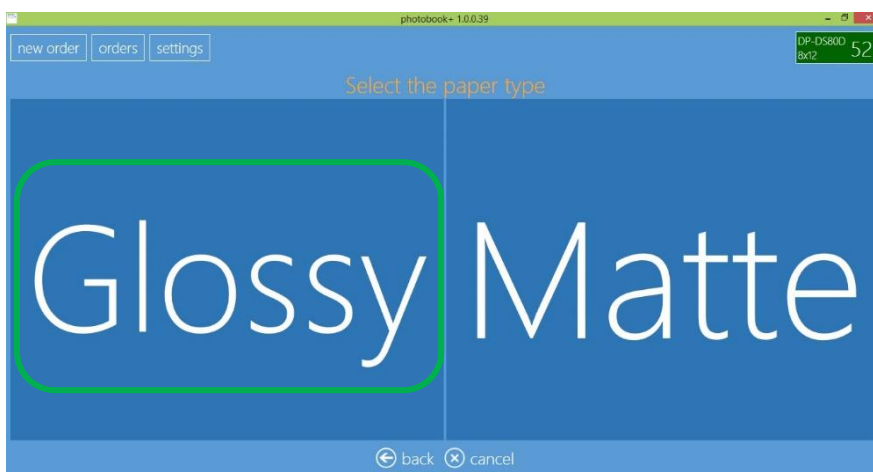

6) Edit print quantity, product, crop and enhance images




7) Change quantity and product



8) Add Text




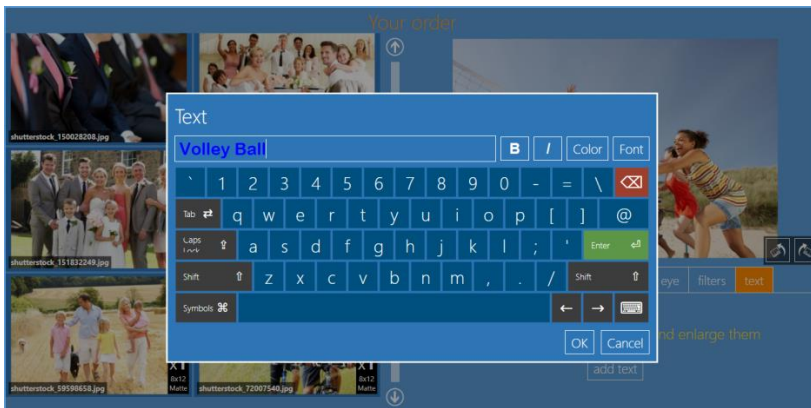


To change text dimensions and rotation click and drag on rotation button



9) Order summary

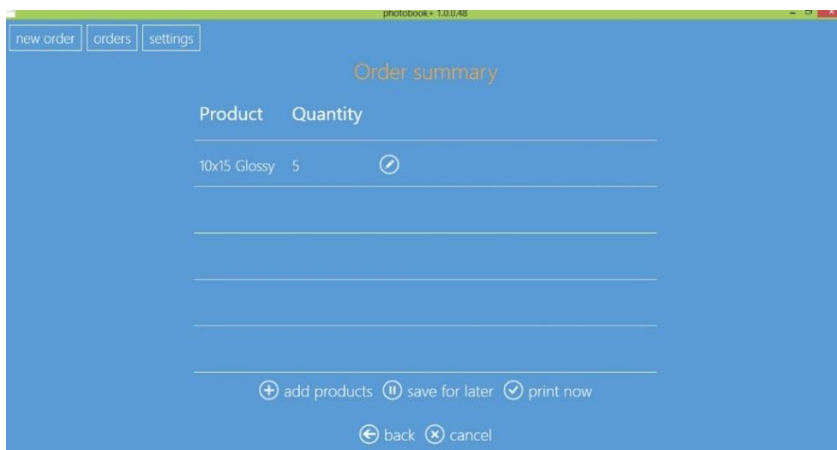


10) Insert Project name

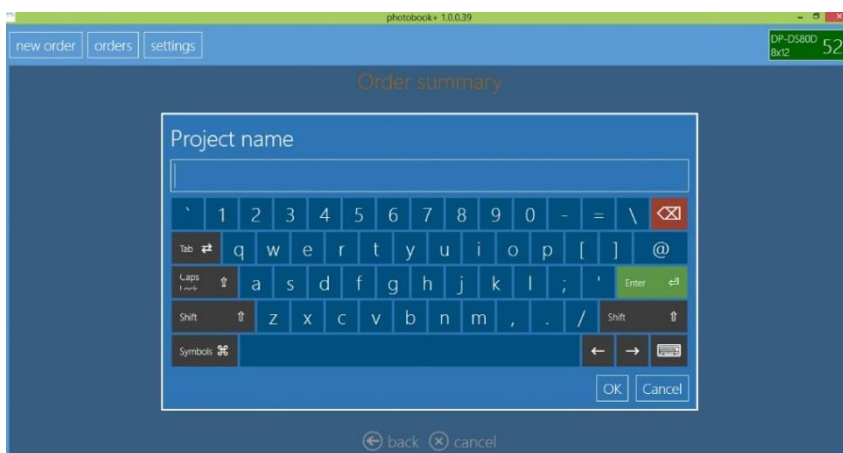


11) Press Enter or OK to finish the order

12) To print, click on "Print now" button control.

Double Sided Prints

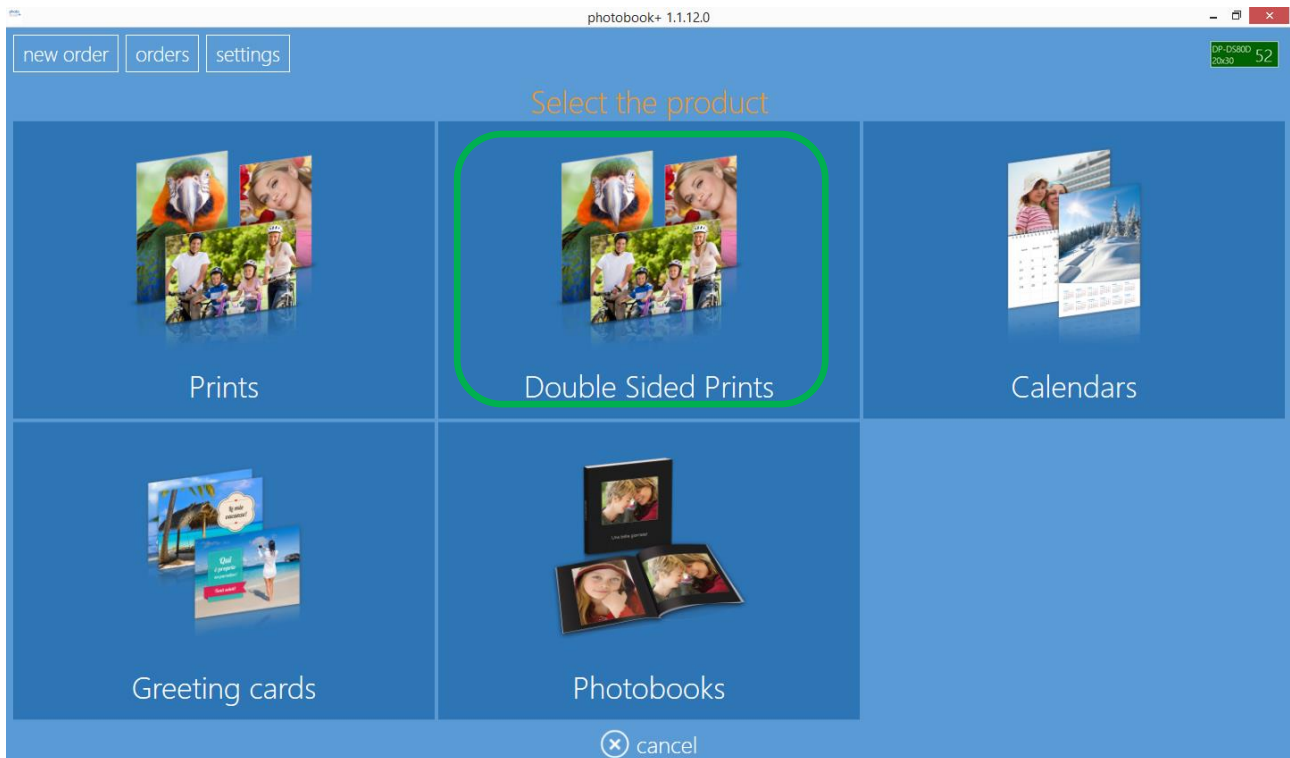

- Double sided prints workflow is same as Prints (Single sided print) workflow.
- Landscape images are folded along short edge. Portrait images are folded along long edge.
- Long edge will mean that you turn from one page to the next along the long edge of the paper, much like an A4 magazine or brochure.

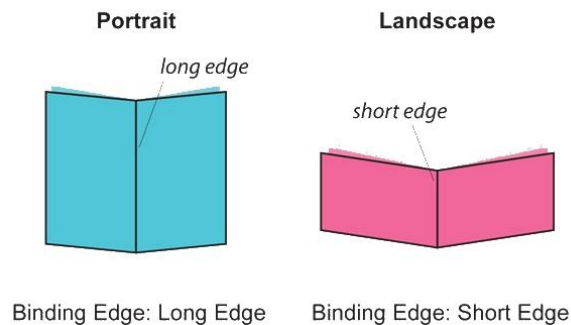

- Short edge would mean that you turn the page from the short edge of the paper, much like that of a notepad.



Note:

Double Sided Prints is available only with for DS 80 DX along with other Duplex Products of Photobook, Greeting Cards & Calendar


Panoramic Prints

This is the Workflow of printing a Panoramic print

Available formats for panoramic:

- 6x14" (15x35cm) and 6x20" (15x50cm) with DS620,
- 8x18" (20x45cm), 8x22" (20x55cm), 8x26" (20x66cm) and 8x32" (20x80cm) with DS820

1) Select Panoramic prints

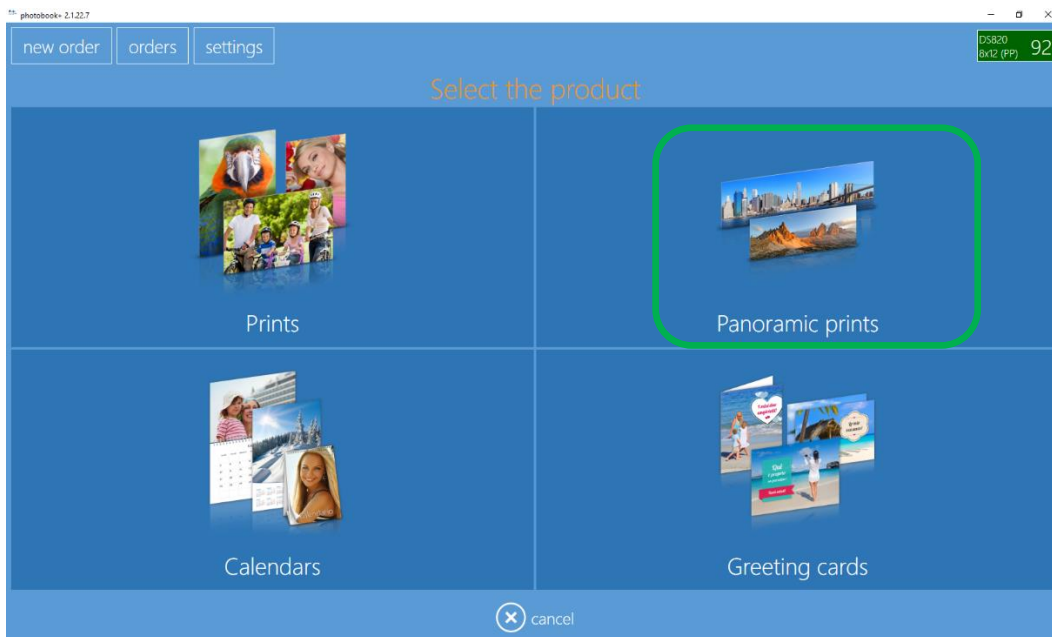


2) Select folder with images



3) Select images




4) Select panoramic size

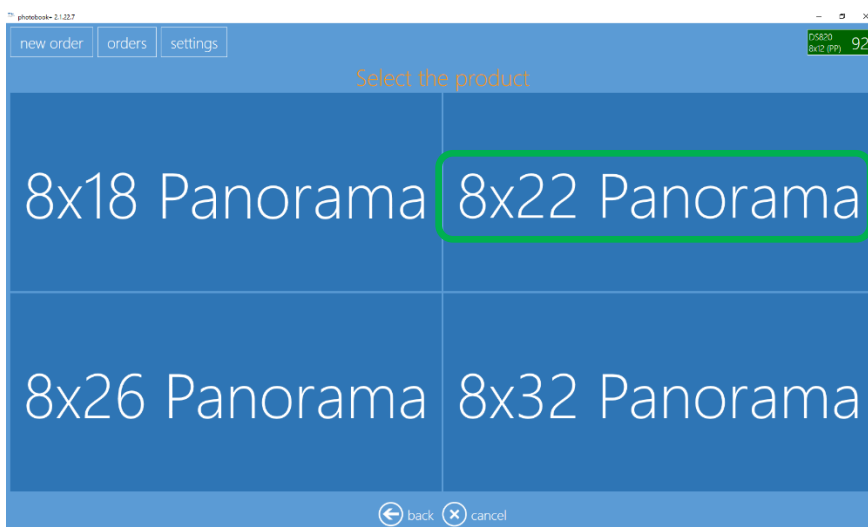


5) Select paper finish




6) Crop and enhance images by clicking on edit

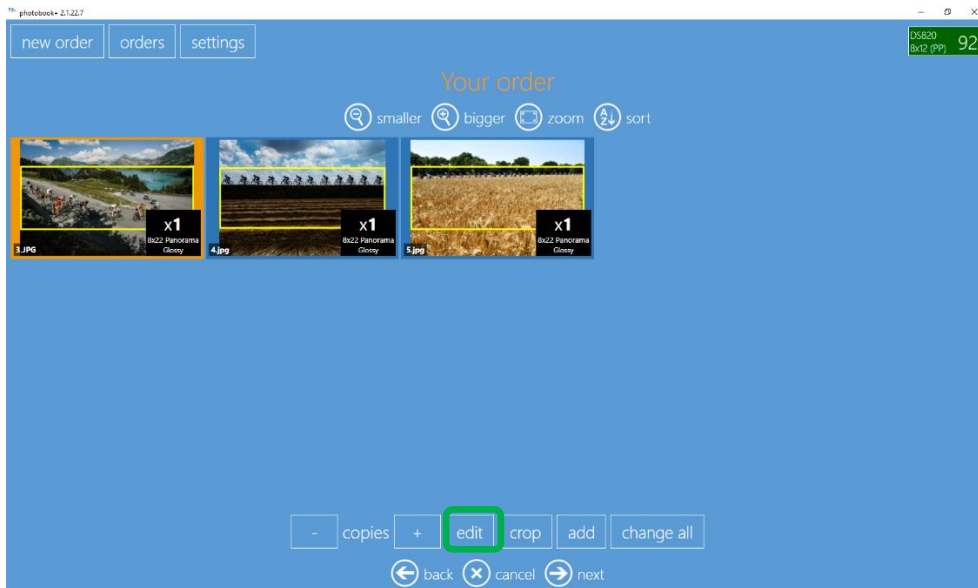


7) Here access to edit, crop, correct, fine rotation, red eye, filters and text functions

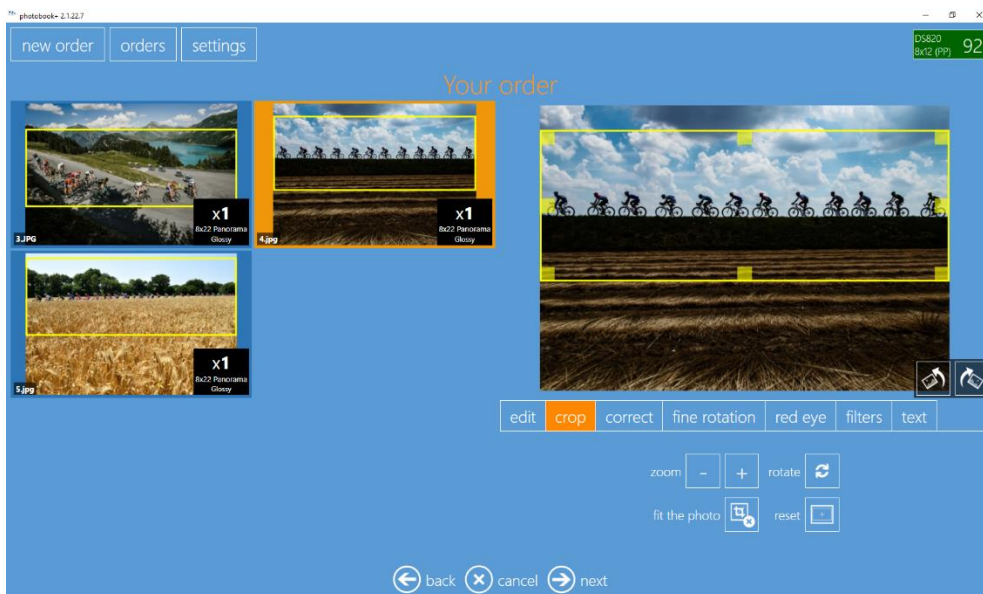

8) Order Summary

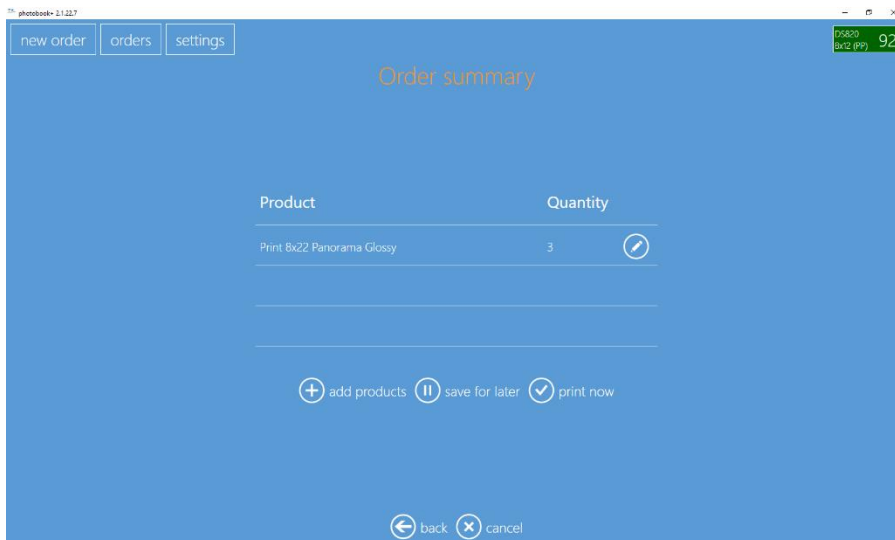

9) Insert Project name

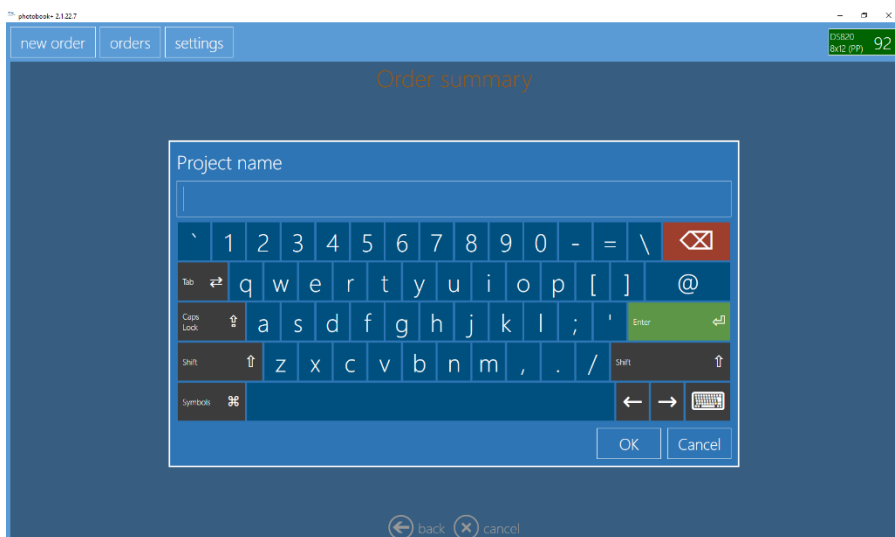

10) Press Enter or OK to finish the order

11) To print, click on "Print now" button control.


Calendars

This is the Workflow of creating and printing a Calendar product


1) Select Calendars



2) Select print size

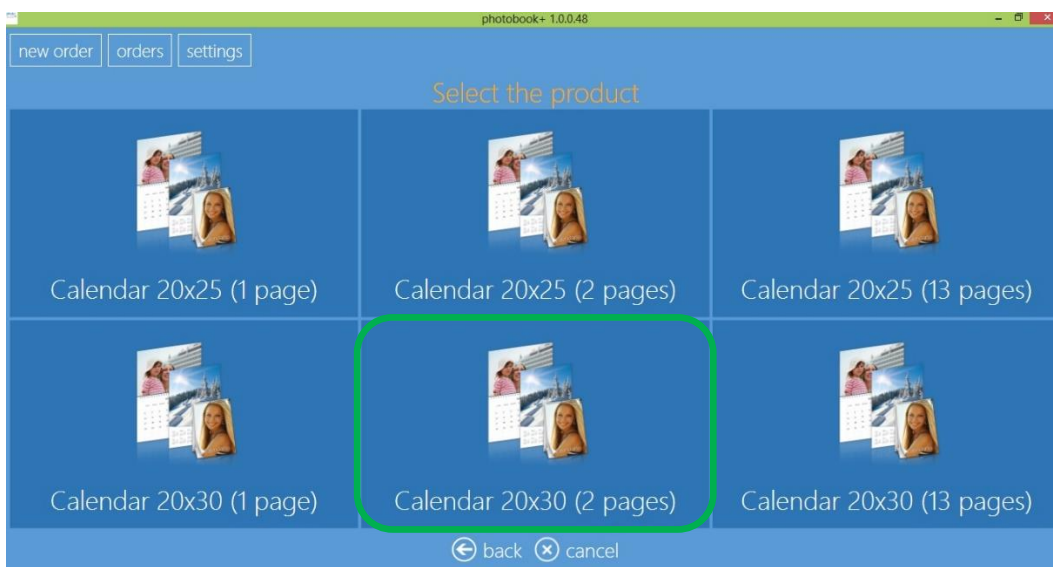


3) Select folder with images

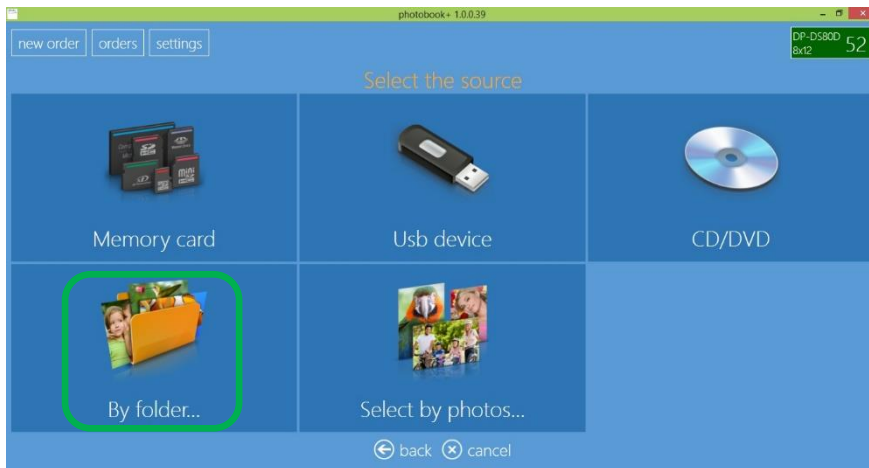


4) Select images




5) Select paper finish

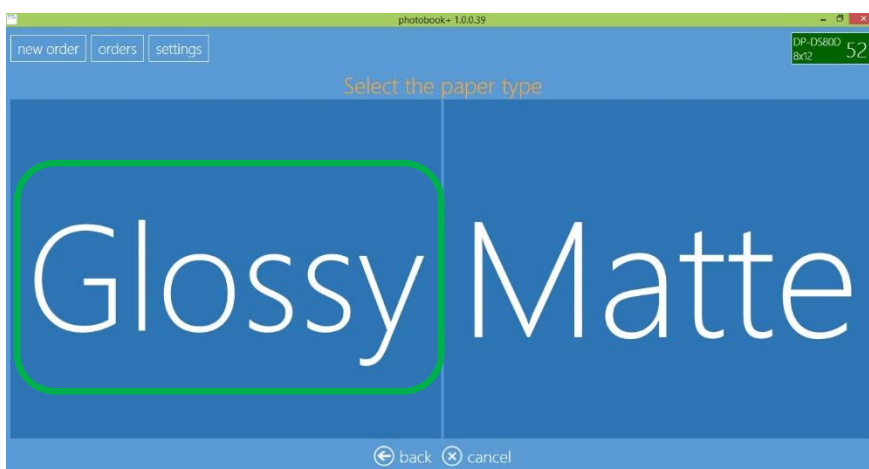

6) Select background theme

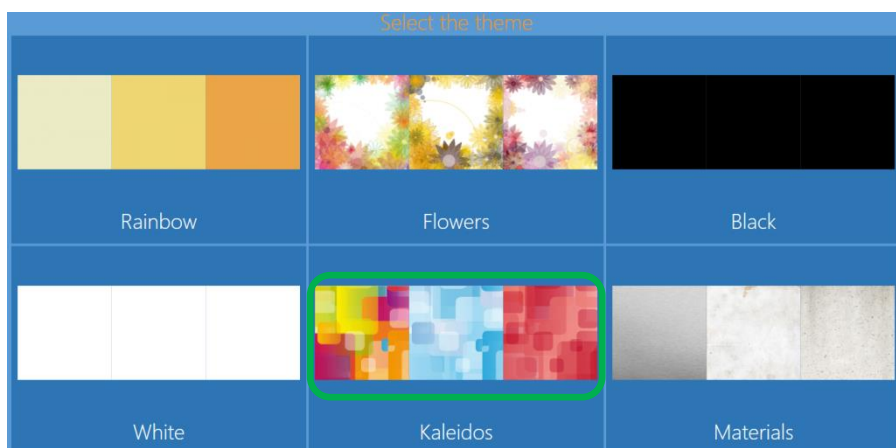

7) Change image sequence

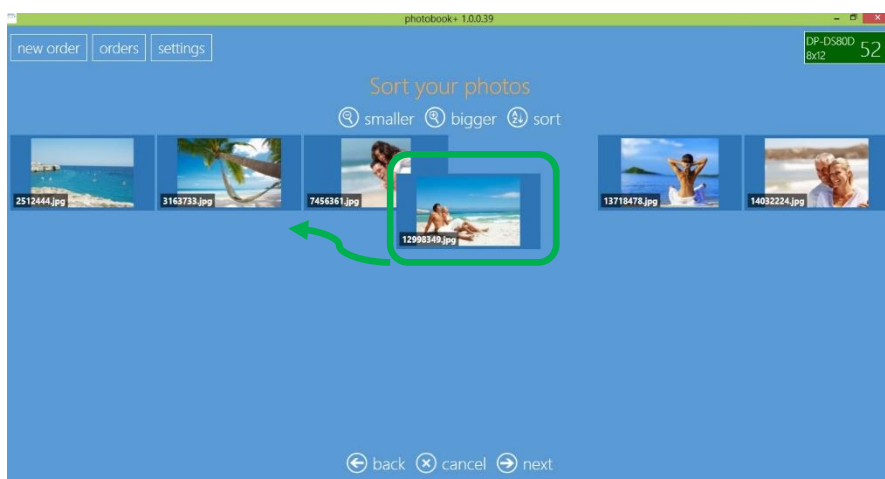


8) Crop and enhance images




9) Select Calendar options: language, country (for national festivals) and starting month




10) Page preview and edit (see Page Editing for explanation, Page number 34)

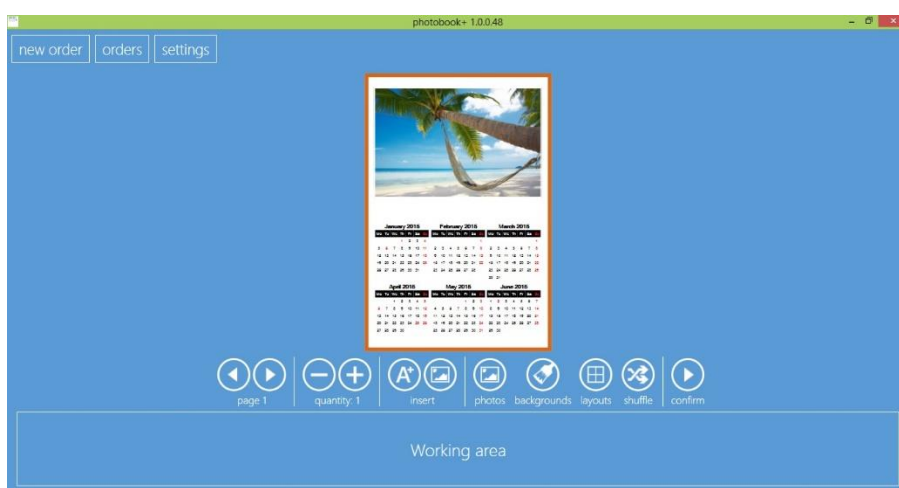

11) Order Summary

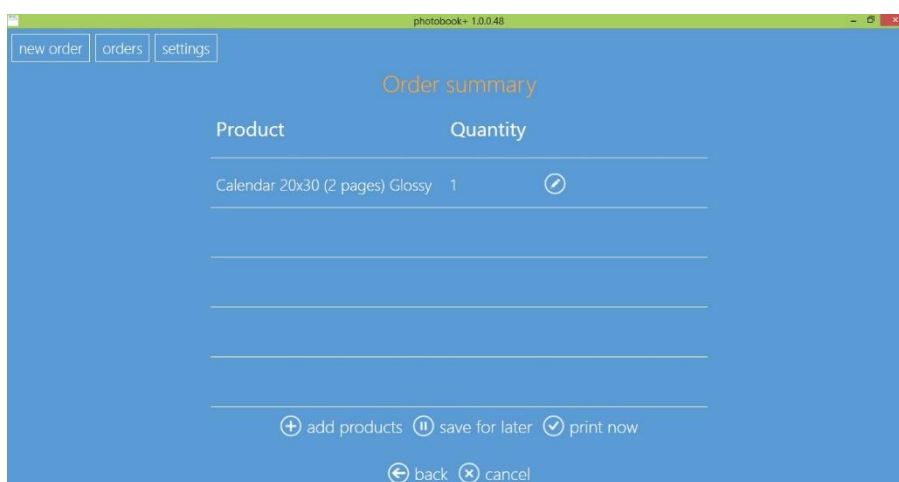

12) Insert Project name

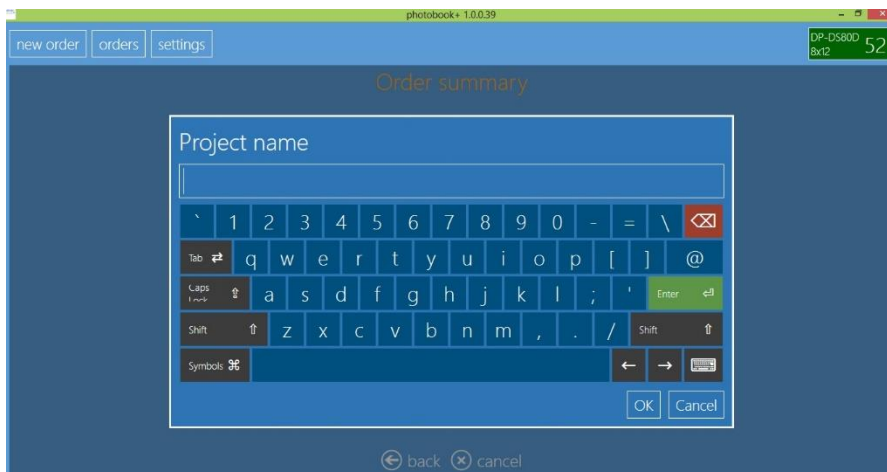



13) Press Enter or OK to finish the order

14) To print, click on "Print now" button control.




Note 1:

-  **Single page Calendar:** It will be printed with Roll Paper
-  **2 Pages & 13 Pages Calendar:** These products will be printed with the Tray Paper




Note 2:

-  **13 Pages Calendar** needs minimum 13 Images to create and print this product.

Greeting cards

This is the Workflow of creating and printing a Greeting Card.


1) Select Greeting cards

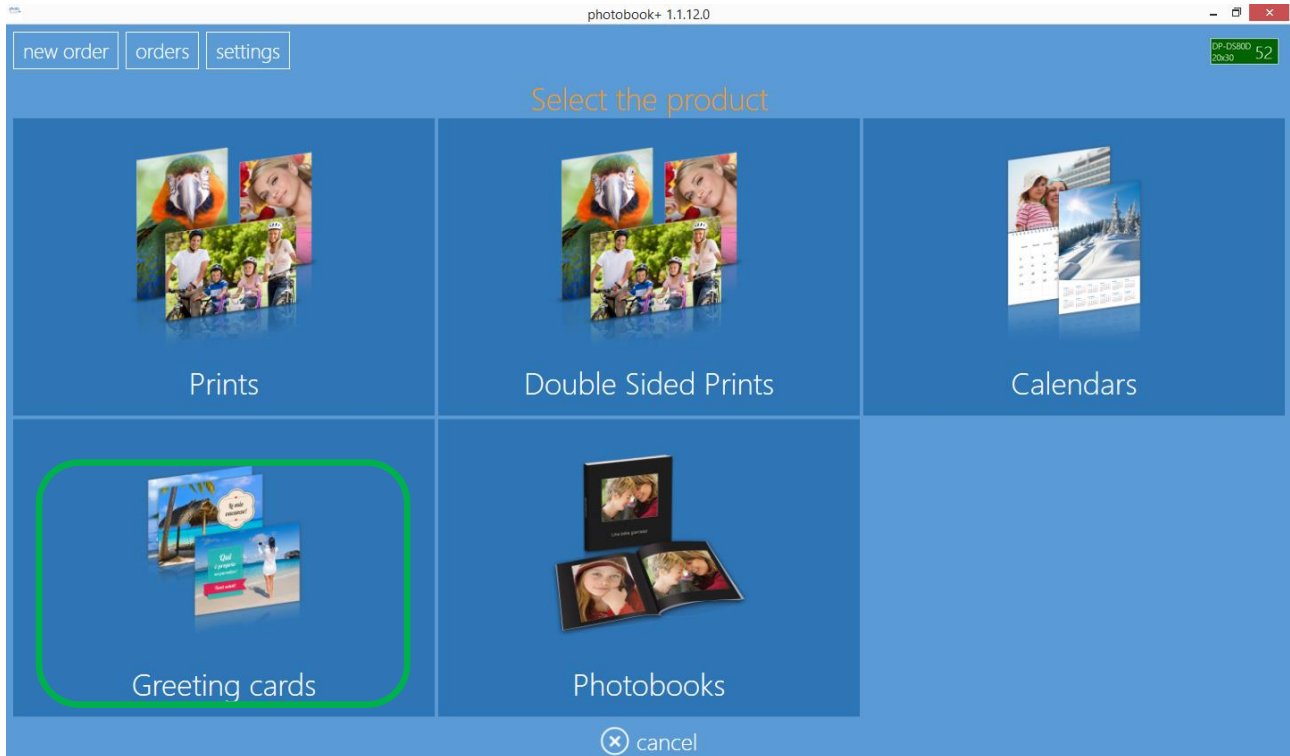

2) Select print size




3) Select folder with images

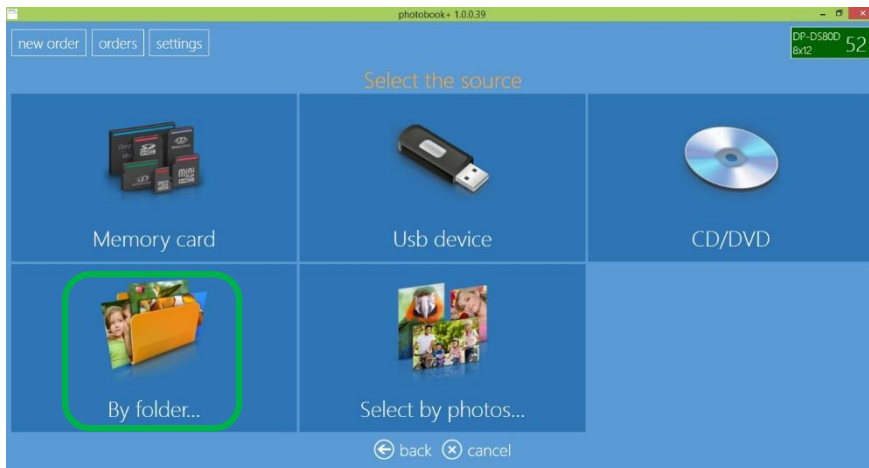


4) Select images




5) Select paper finish

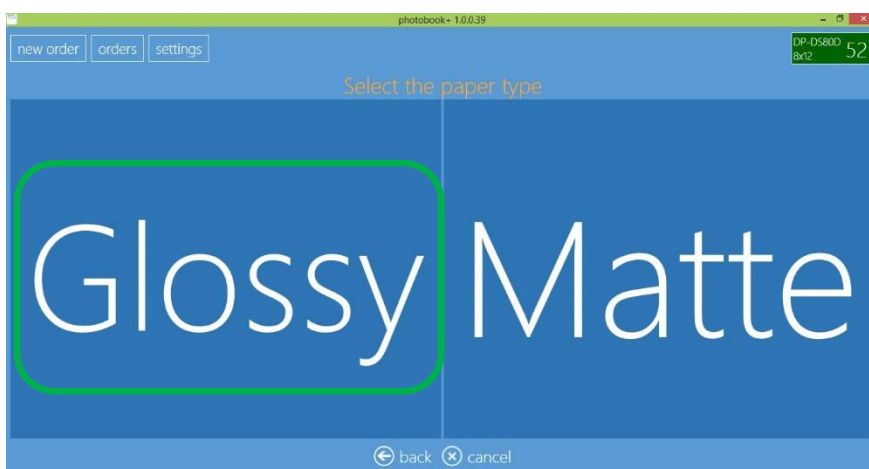

6) Select background theme

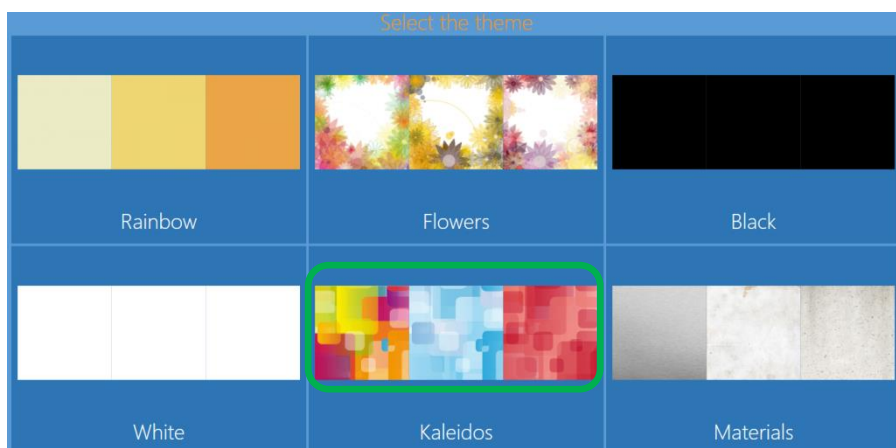

7) Change image sequence

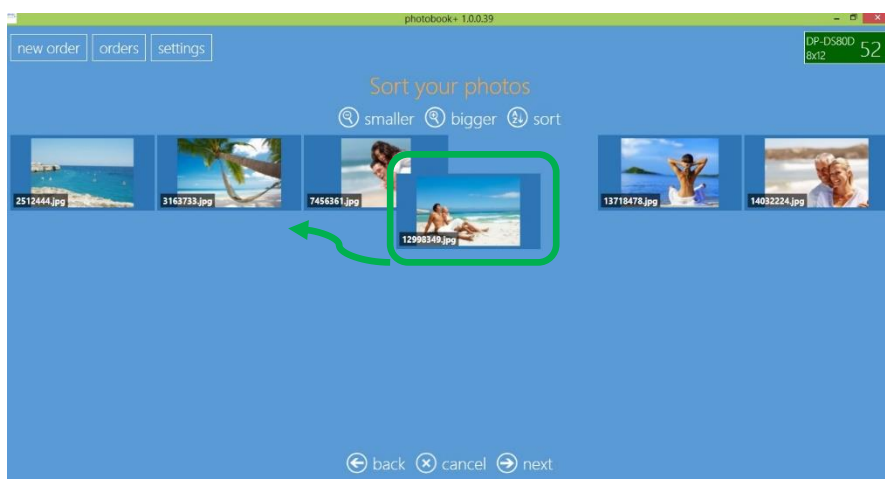


8) Crop and enhance images




9) Page preview and edit (see Page Editing for explanation, Page number 34)



10) Order Summary

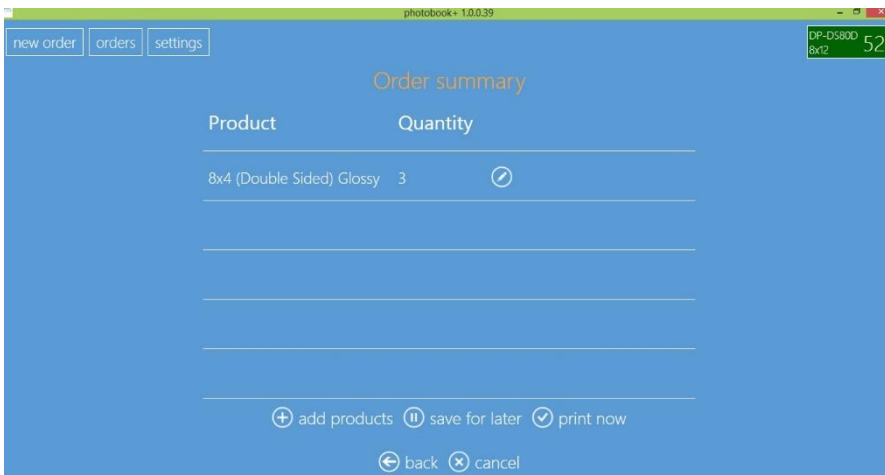

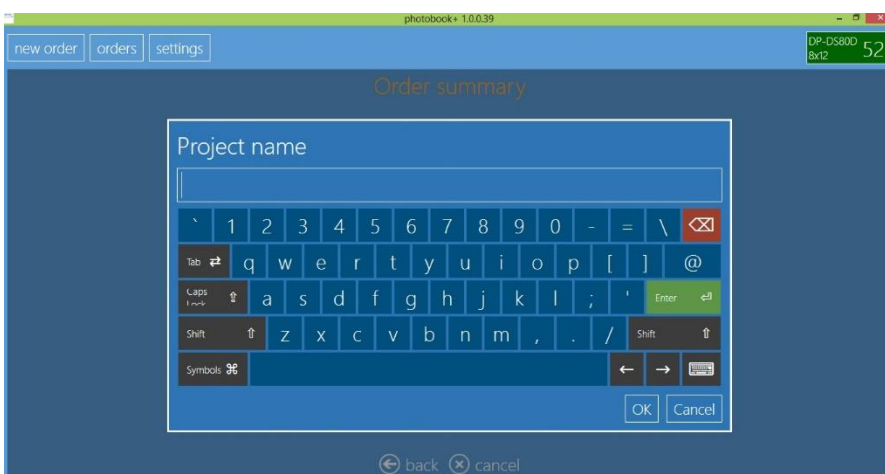

11) Insert Project name




12) Press Enter or OK to finish the order

13) To print, click on "Print now" button control.

Note 1:

-  **Single Sided Card:** It will be printed with Roll Paper
-  **Double Sided Photo Cards:** It will be printed with the Tray Paper

Note 2:


-  **Quantity:**
 - Default quantity for 4x8 GC is 3 for 8x12 Media
 - Default quantity for 4x8 GC is 2 for 8x10 Media
 - Default quantity for 6x8 GC is 2 for 8x12 Media
 - Default quantity for 6x8 GC is 1 for 8x10 Media



Photobook: 4X4 Square

This is the Workflow of creating and printing a Photobook.


1) Select Photobooks

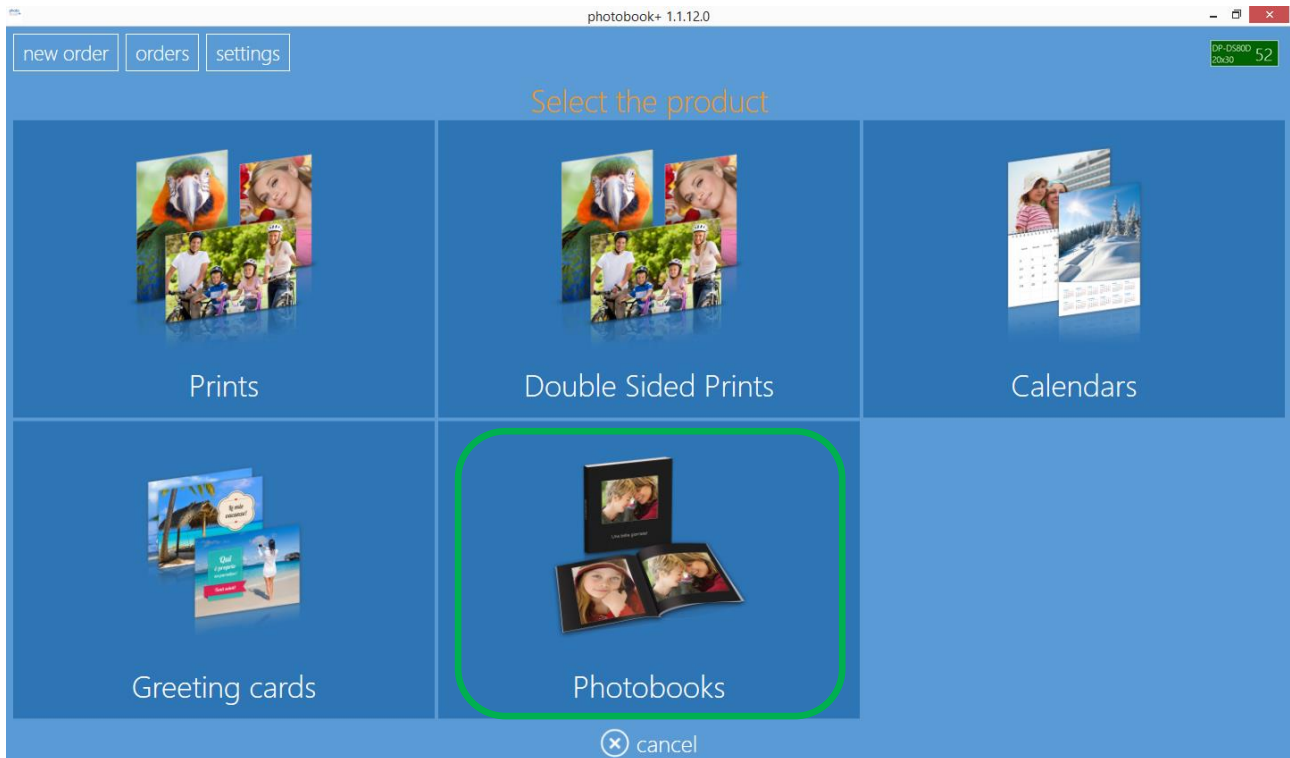


2) Select print size




3) Select folder with images

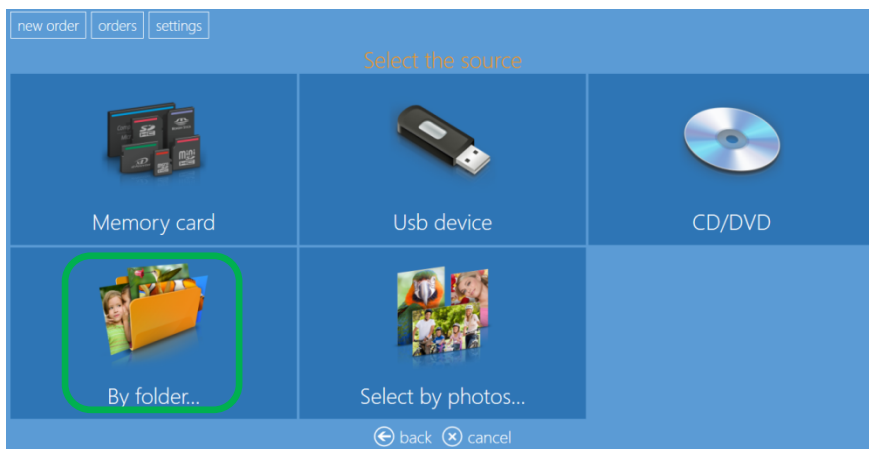


4) Select images of Min 12/16/20.....

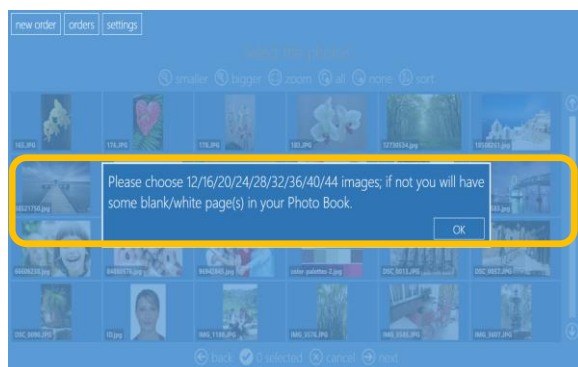

5) Select paper finish

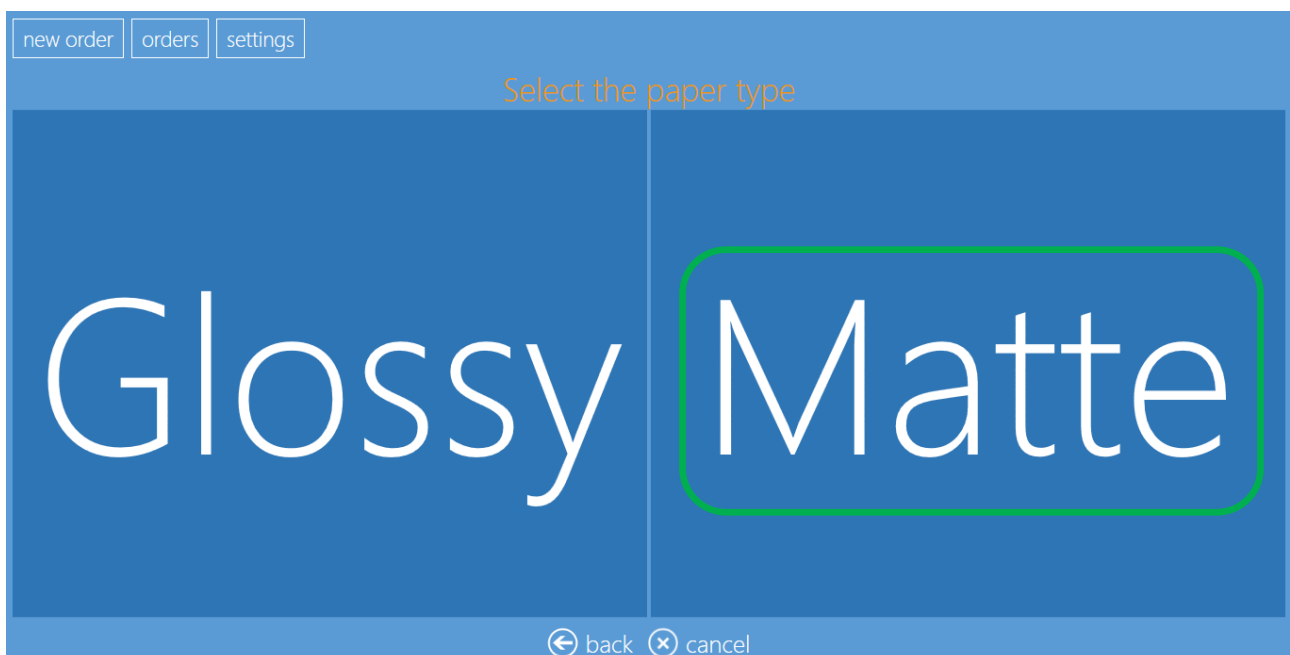

6) Change image sequence

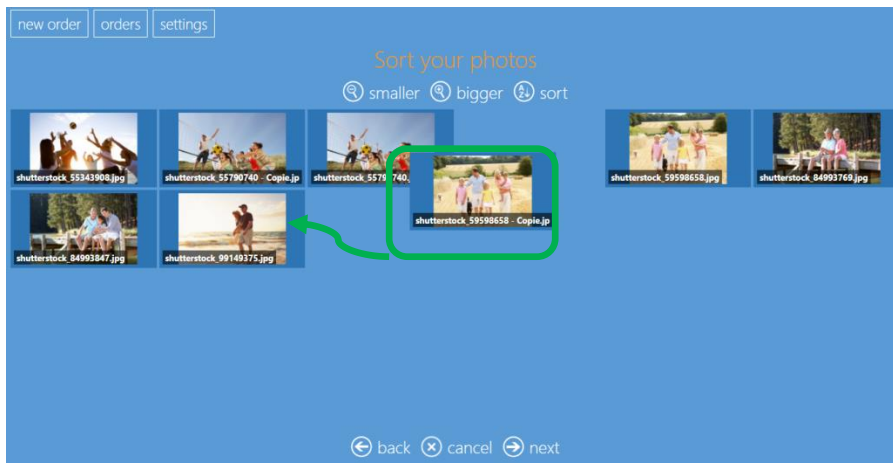


7) Crop and enhance images




8) Enter the title of the book




9) Select a cover photo for the photo-book cover page

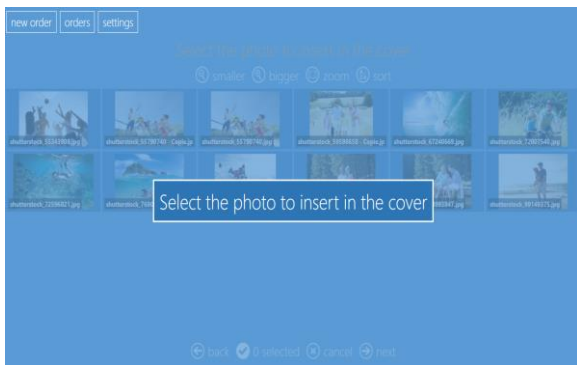


10) Nice '4x4' Square photo-book is generated

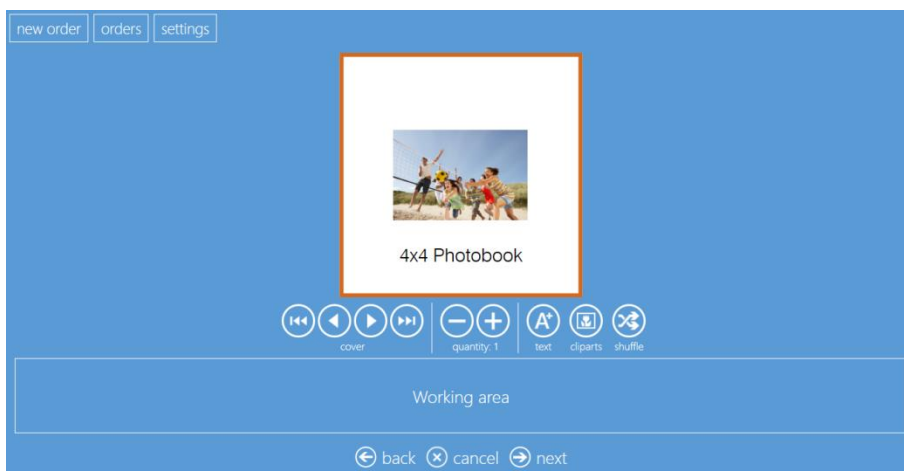

11) Order Summary

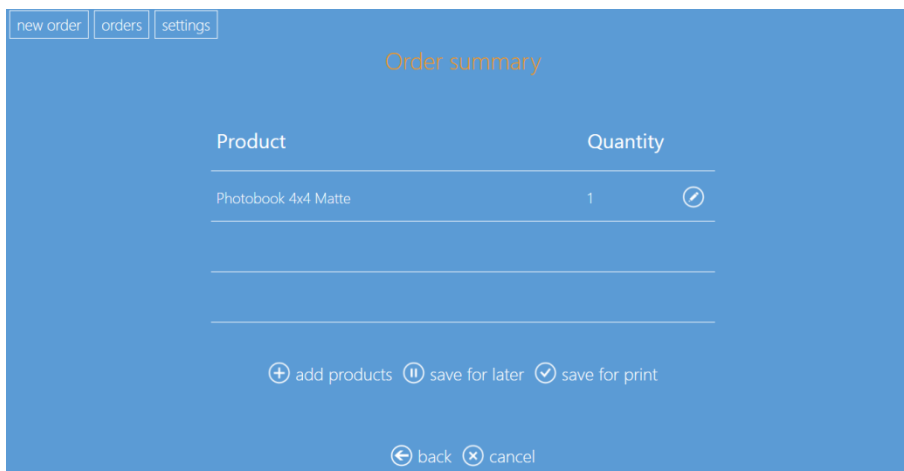

12) Insert Project name

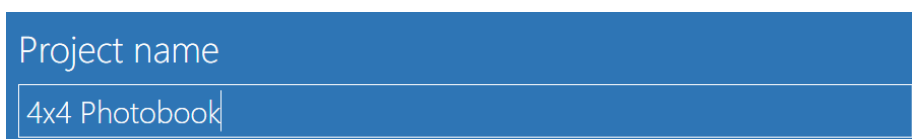


13) Press Enter or OK to finish the order & to print.


Photobook: 8x12 Landscape

This is the Workflow of creating and printing a Photobook.


1) Select Photobooks

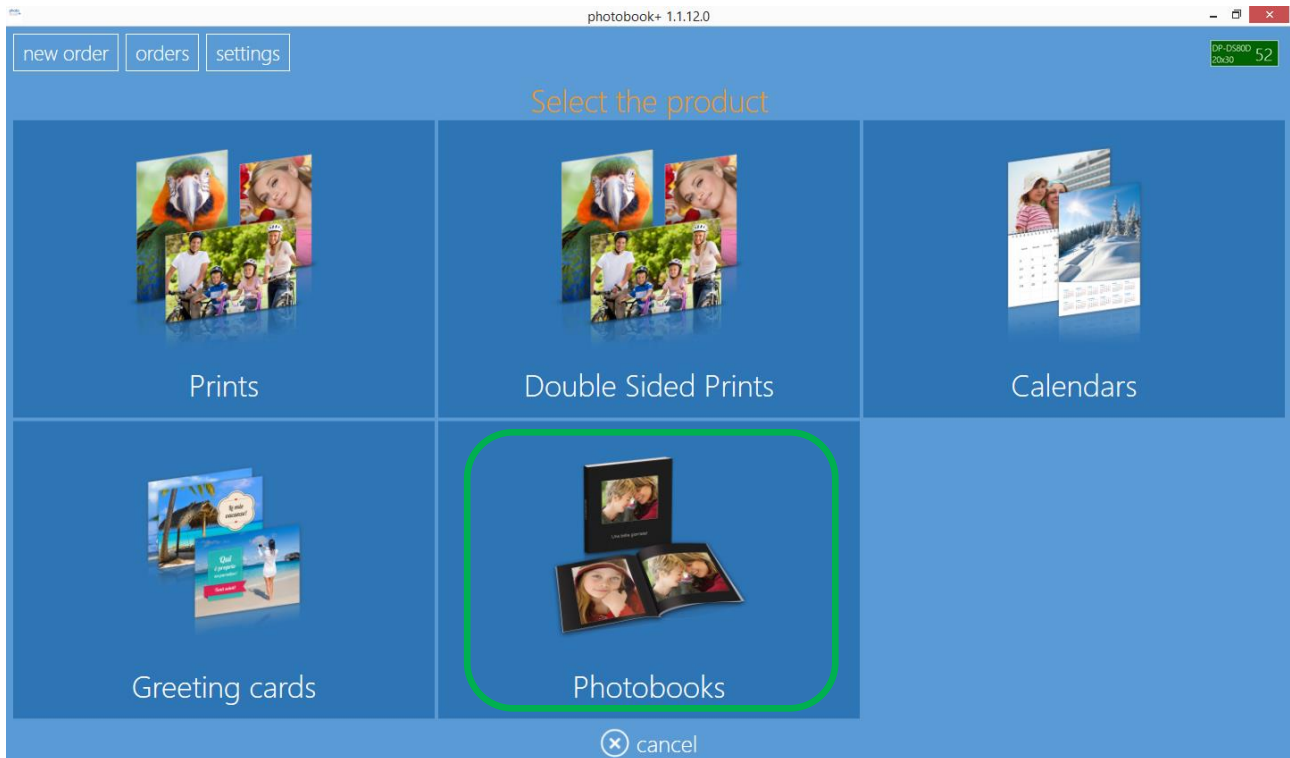


2) Select print size

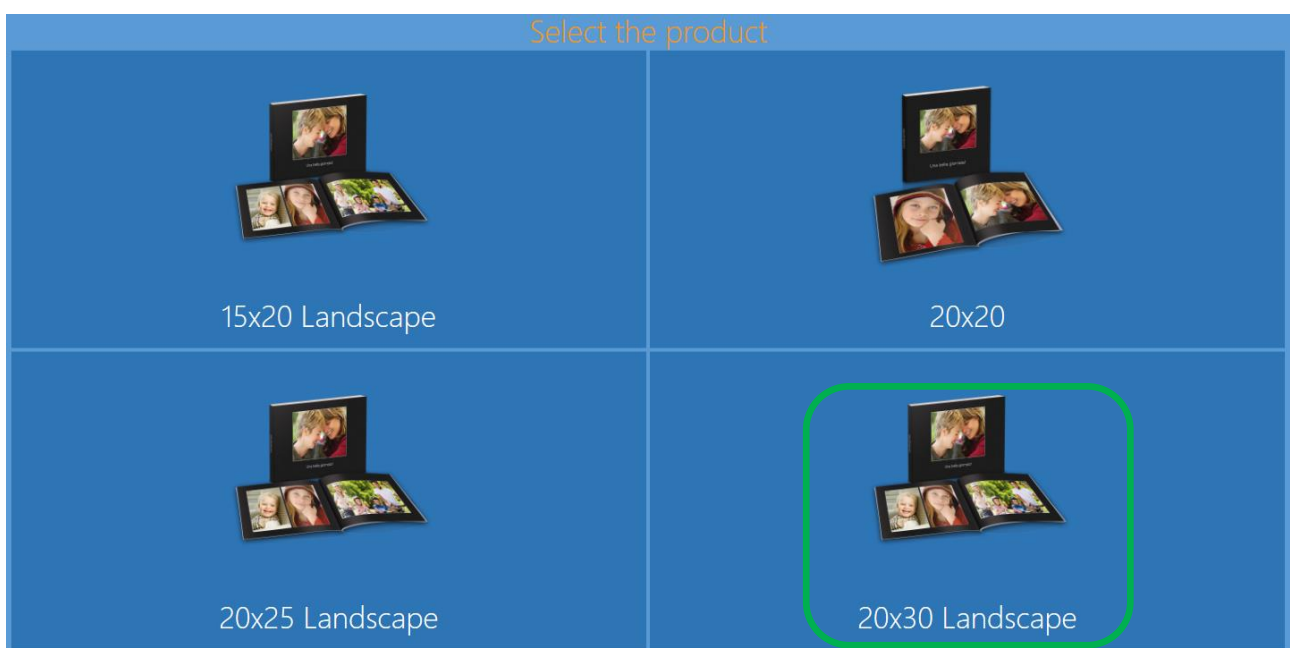


3) Select folder with images

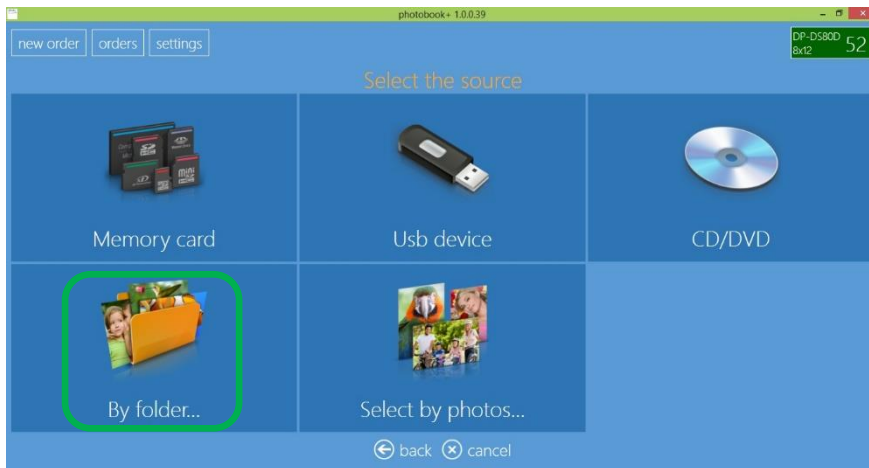


4) Select images

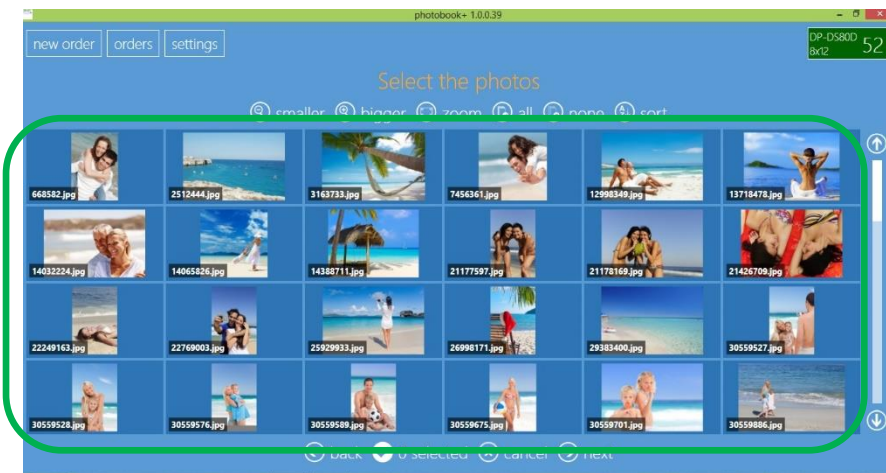

5) Select paper finish

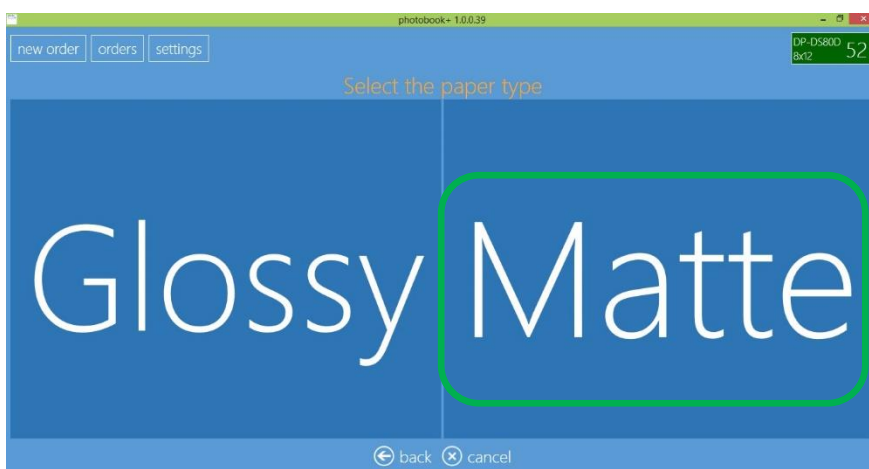

6) Select background theme

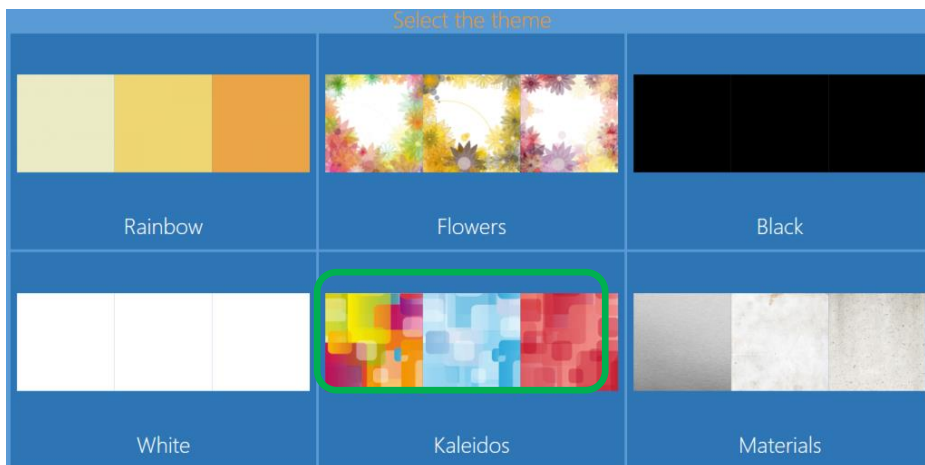


7) Change image sequence




8) Crop and enhance images



9) Input Book title

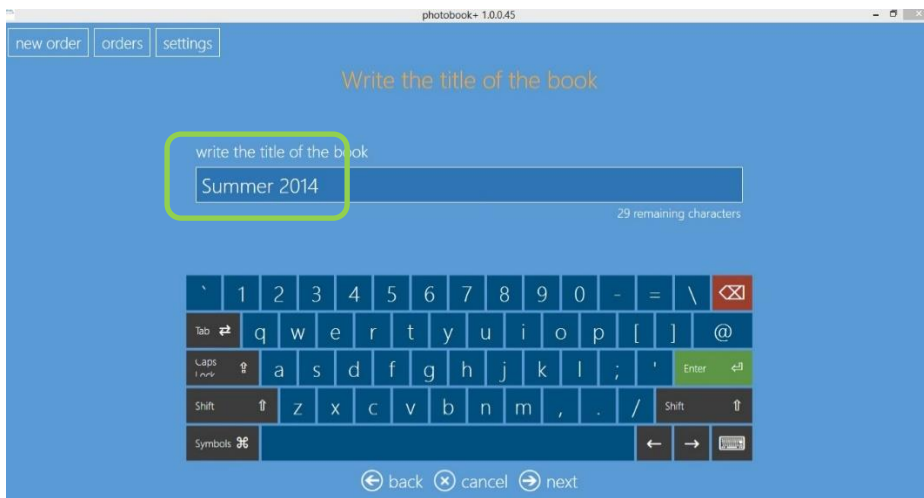


10) Select image for the cover

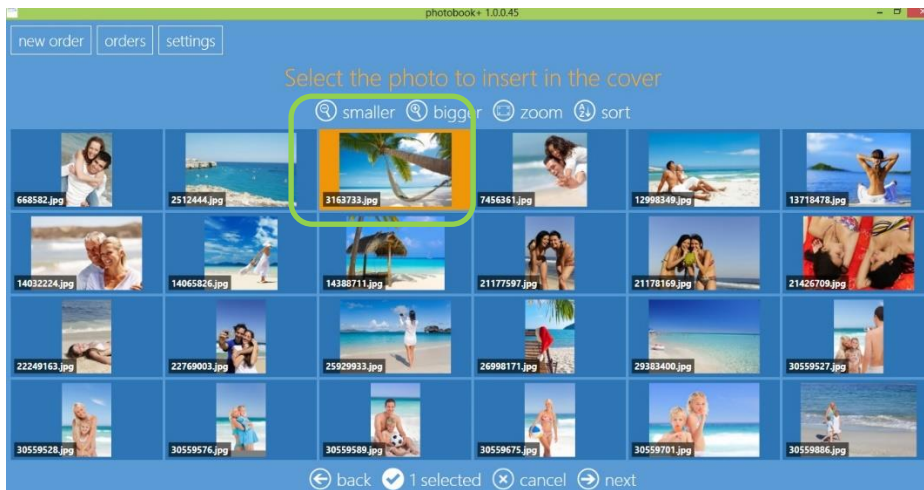


11) Page preview and edit (see Page Editing for explanation, Page number 34)



12) Order Summary

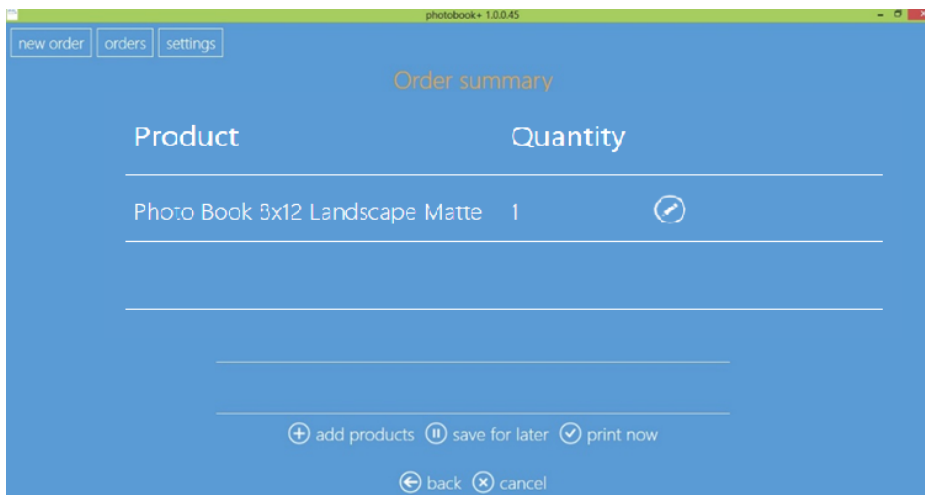

13) Insert Project name

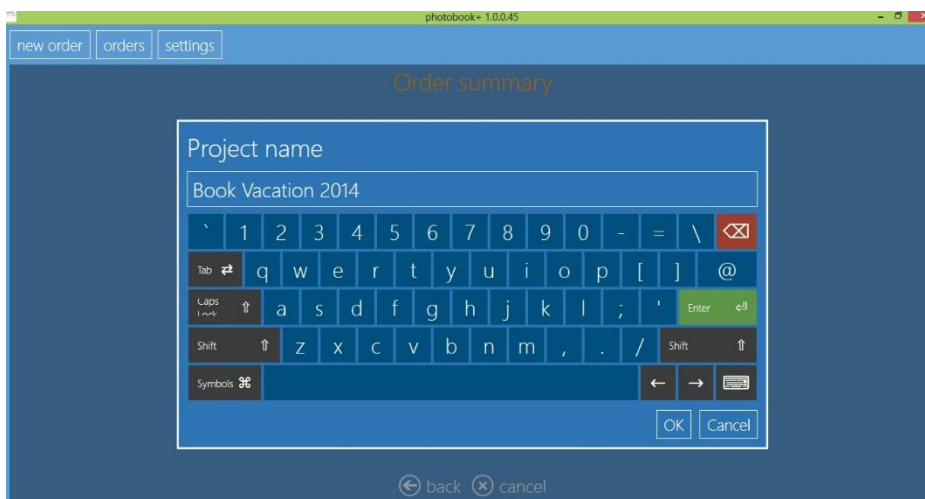


14) Press Enter or OK to finish the order

15) To print, click on “Print now” button control.

Page editing

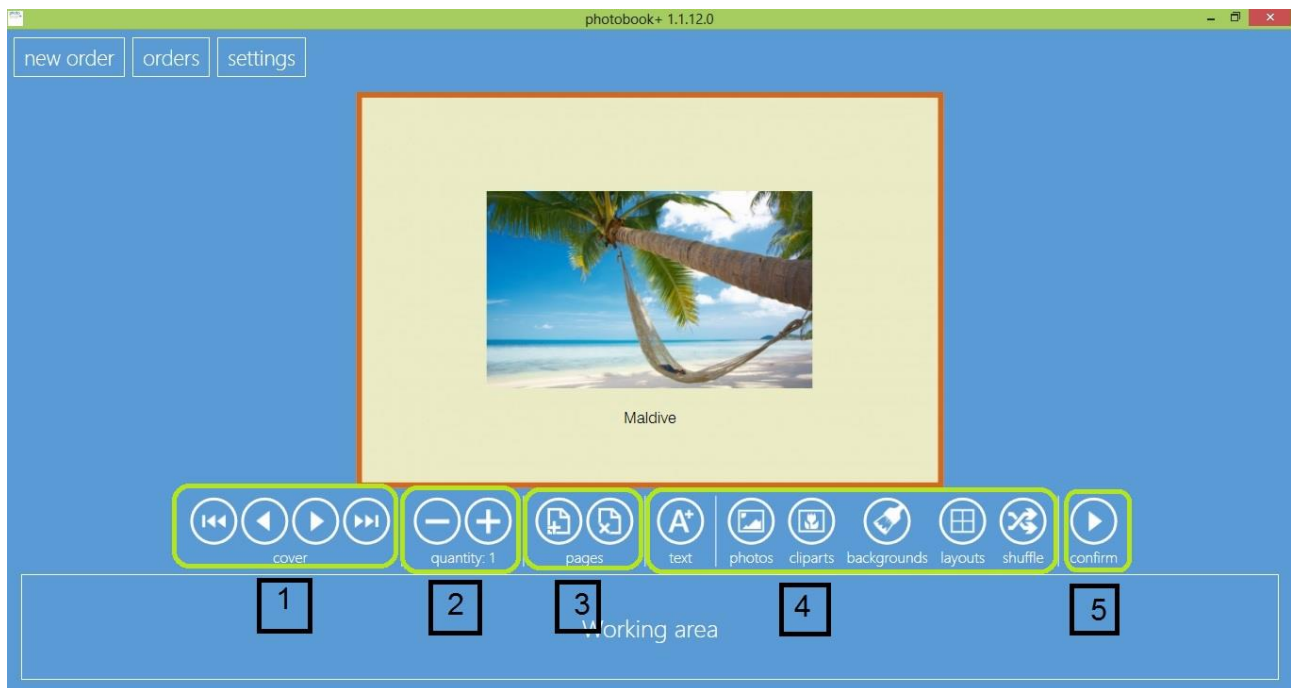

Page commands





1. Navigation buttons: To go to first page, back and forth one page, go to last page.
2. Quantity: To Increase and decrease quantity of the product. The step can be changed going into settings / products
3. Pages: To add one page and remove one page
4. Text: To insert text and insert image. Images can be inserted also with drag and drop from working area.
Photos: To open loaded images window. It is possible to load more images and to drag and drop images to working area.
Clipart: To open clipart selection window. Drag and drop selected clipart.
Background: To open background selection window. You can select a background within the Theme or select an image to be used as background. Background can be applied to current page or to all pages.
Layout: To open layout selection window. You can select a layout to be applied to the current page. Note: cover layout is fixed.
Shuffle: To change automatically the layout of current page.
5. Confirm: To exit from page editing and proceed to order summary page.



Note : Drag & Drop Image

-  Select '**Photos**' button control
-  Select an image, simply drag & drop on the template
 - *Attention:* Dropping on the Image will replace with the new one

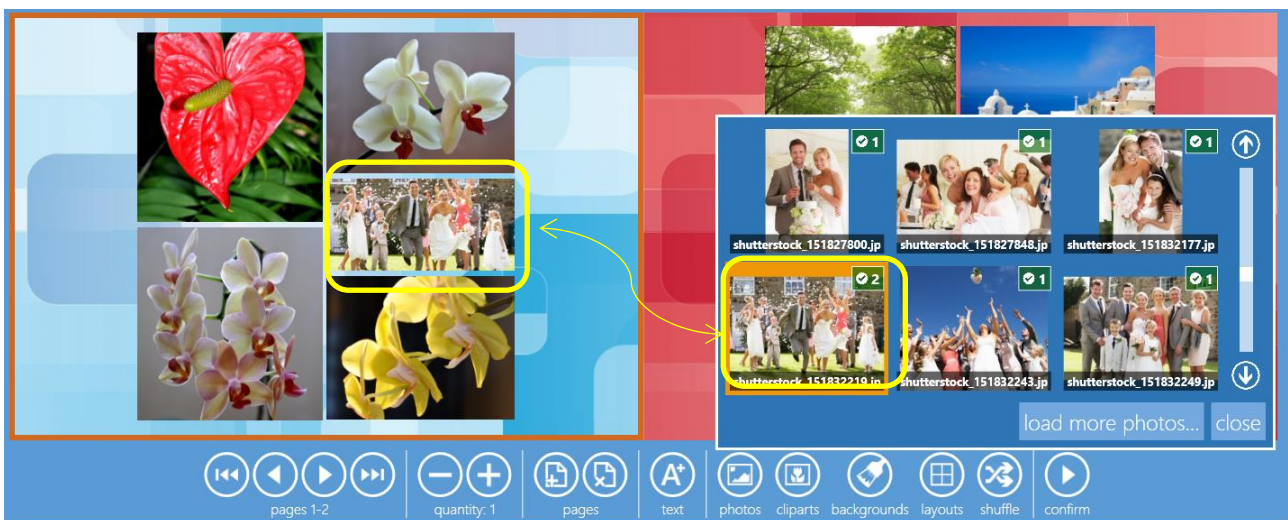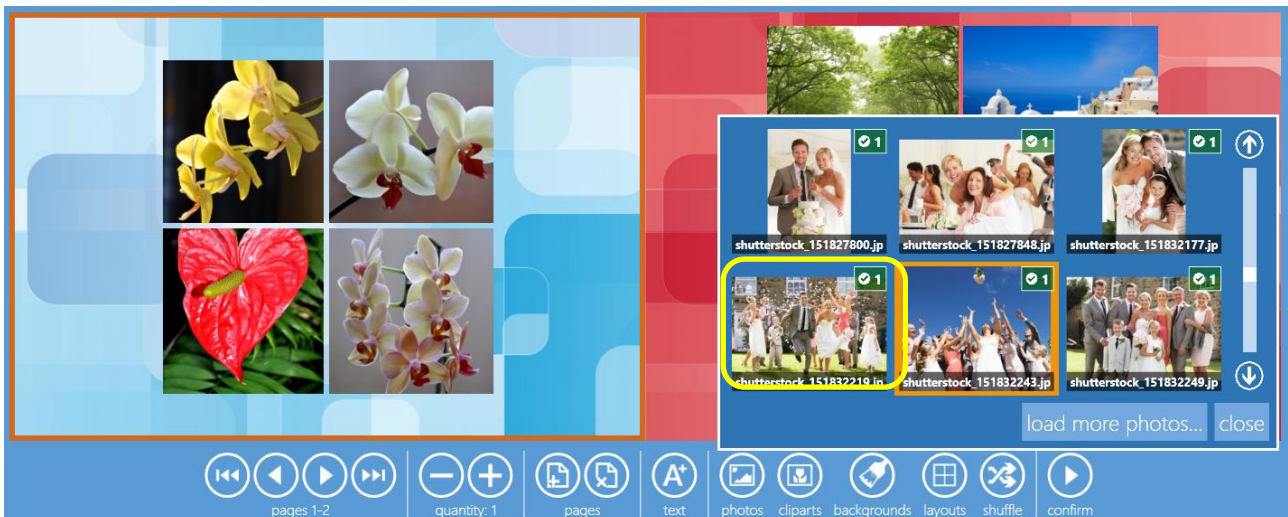




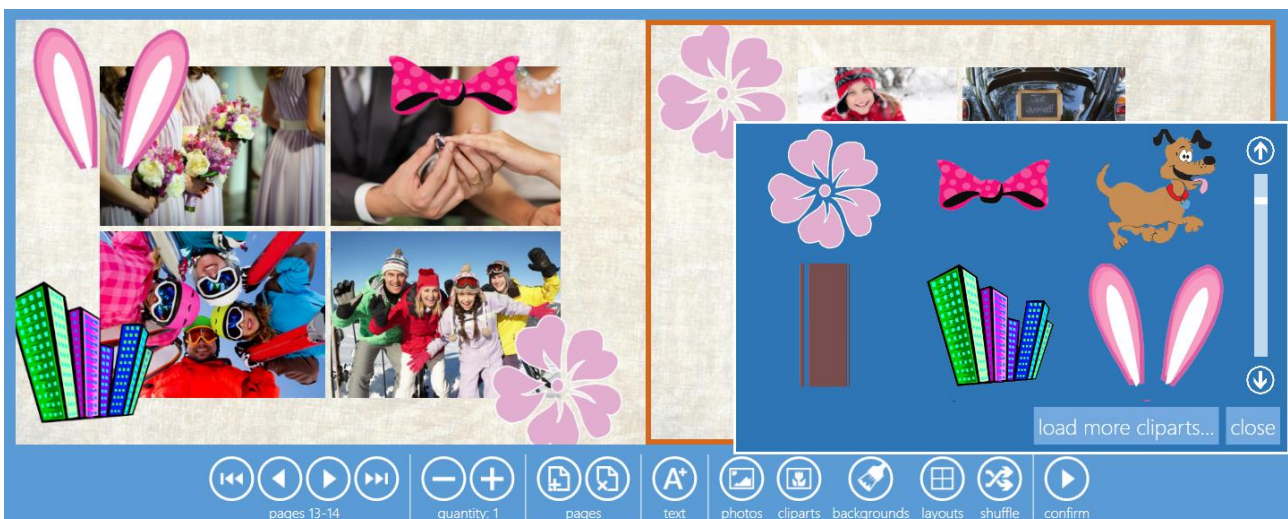
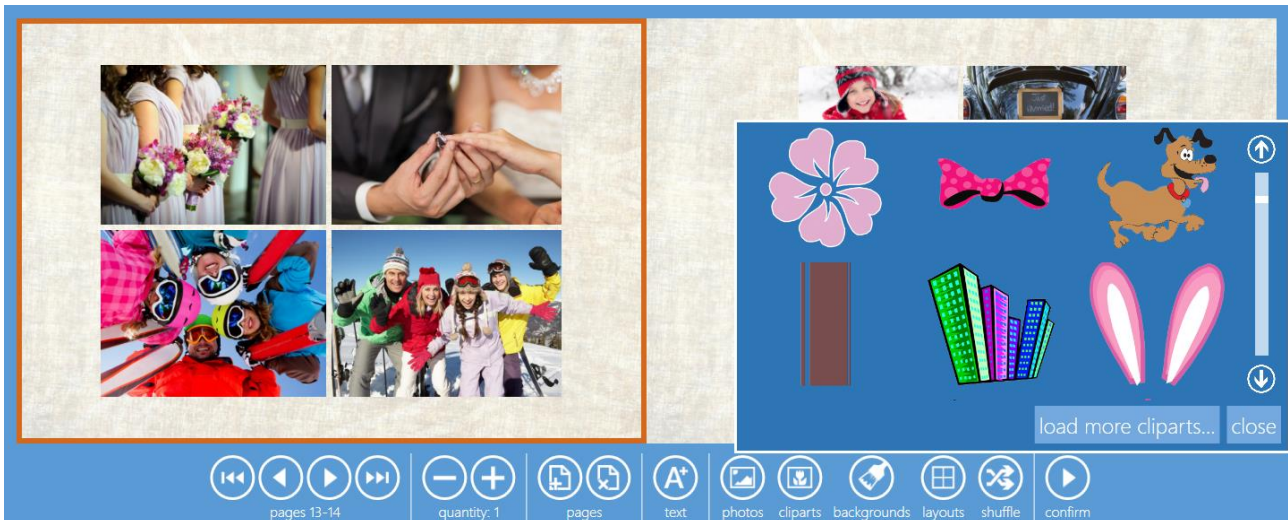
- ✚ On the right side we can see that the illustrated image incremented by 2
 - I.E. The particular image is being used twice
- ✚ On the left side we can the image is been perfectly dropped
 - Attention: The layout can be used until 9 images, Greater than 9 images the user can re-arrange the images manually

Note : To Add Photos to the current directory

- ✚ Select the button control 'Load More Photos...'
- ✚ Select the Image(s), click on Open
- ✚ Select image(s) will be saved into the current directory for further usage.

Note : To Add ClipArts

-  Select the button control 'Clip Arts'
-  Select the file(s)
-  Drag & Drop over the image(s) or on the template



Layout editing



Rotate: To rotate image inside the box. Step 90°

Zoom: To enlarge and decrease image. Change position of image within the layout box

Brightness: To increase and decrease opacity (transparency) of image. Default is 100% opacity


Position: To bring image on top of other images or behind other images

Background: To set image as background image


1. To change position of layout box. By clicking on this button or inside the image you can drag and drop image box in any position within the page and other pages. Image can also be moved to Working area for temporary storage
2. Four buttons to change box dimensions. You can drag and drop each button to move the related side.
3. Rotate button: To rotate the layout box. You can drag and drop the button to change dimensions and rotation of image box
4. Edit: To open image into image editing window with cropping and color adjustments possible.
5. Delete button: To remove image from the page and save it into the Working area

Orders (Order History)

Click on orders button

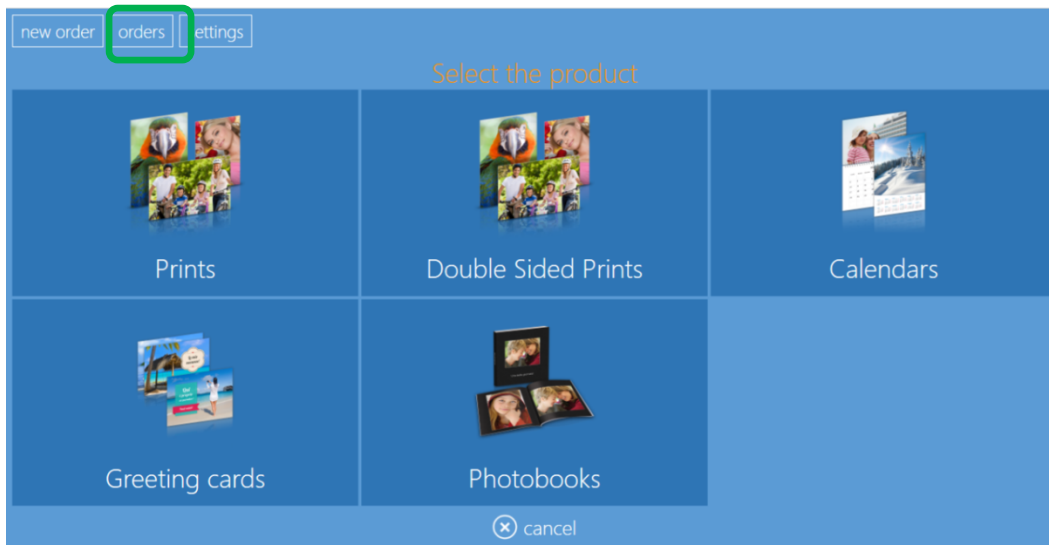

It will open orders page

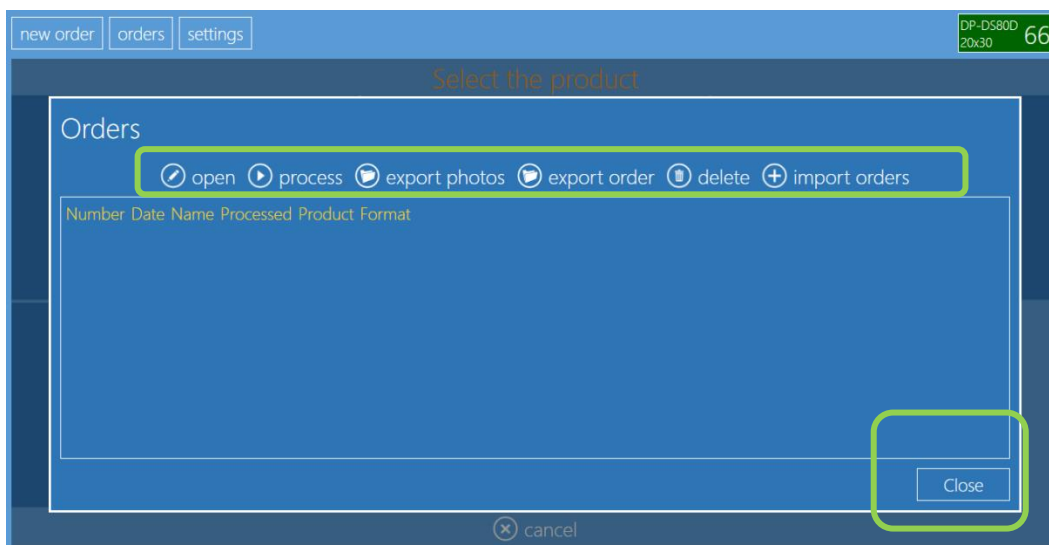

Open: it will open order and allow editing it again

Process: it will process again the selected order. A copy of the order will be created

Export photos: it will export all images used into selected order to a specified folder

Export order: it will export order images into a specified folder

Delete: it will delete selected order

Import Orders: Allows getting the order(s) done "Photobook + Home" version.

Print page: it will print only selected page


Print until end: print all pages from selected page to last page

How to print an order from 'Photobook + Home version'?


From the orders history (please refer the above page), the function “**import orders**” allow importing the order done by “Photobook + Home” version starting from “PhotoBookPlusD_2.0.26.12”

Instructions:


- Click on Import Orders
- Go to the folder, where the order is located
 - Wherever the order may located from USB/HDD/Ext HDD

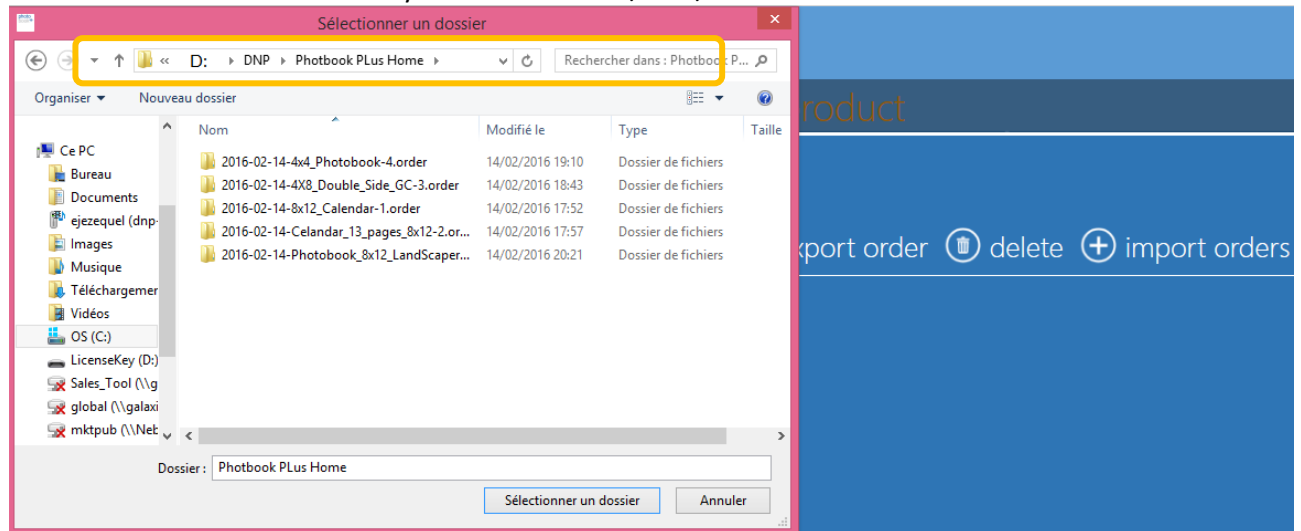


- For example: The order is located under the directory DNP/Photobook Plus Home/
- Select the order to be printed, For ex: **Photobook 8x12 LandScape**

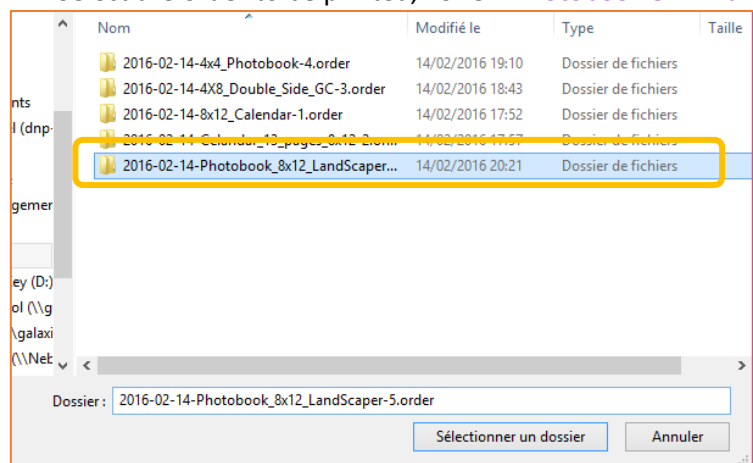


- Please wait for the message confirmation & click on 'Ok'

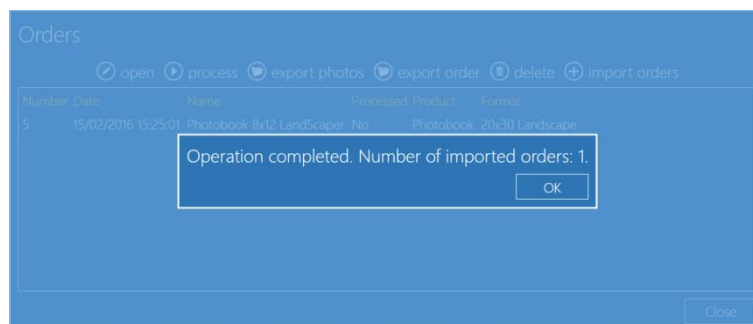

- Select the order, which is imported & please wait until the software finishes the extraction

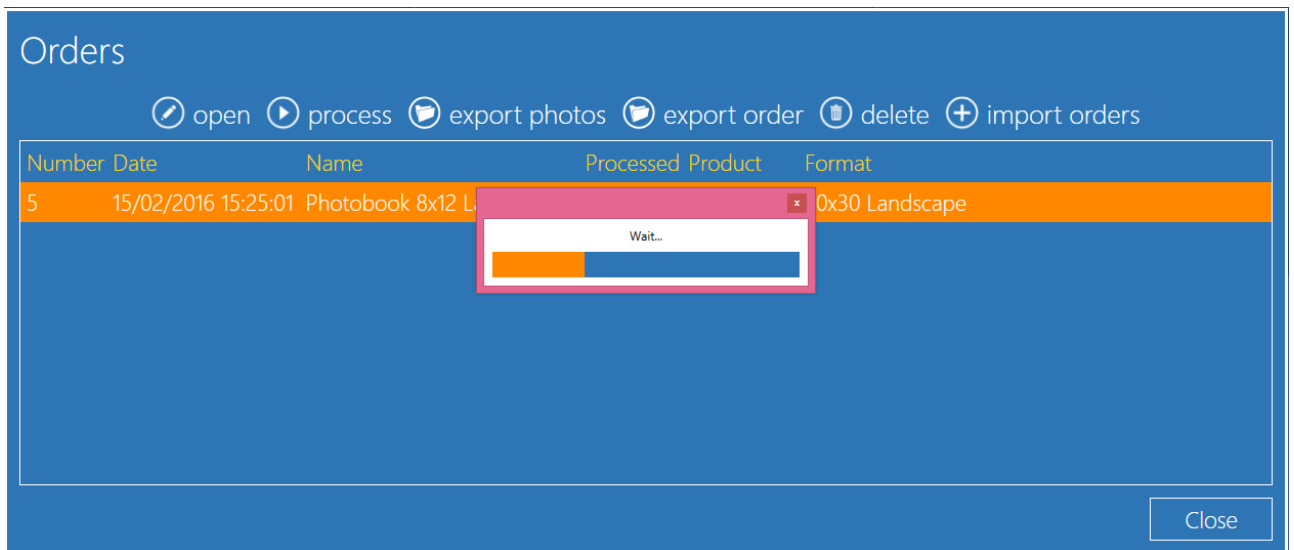

- Now, we can click on "Print" per page by clicking on the "Print" button & print the whole order by clicking on the button "print until end"

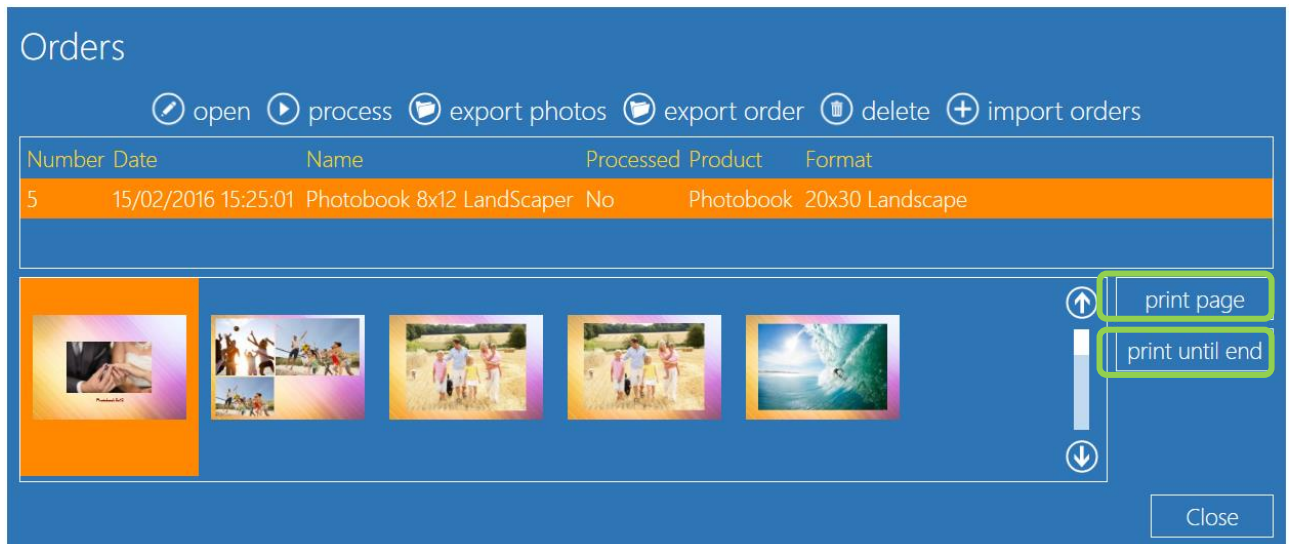


Note :


- Many orders can be imported at a time
- One only order can be printed at a time / Page by page
- The printer & license dongle must be connected to fulfil the print job.

Settings – General

 Click on **settings** button

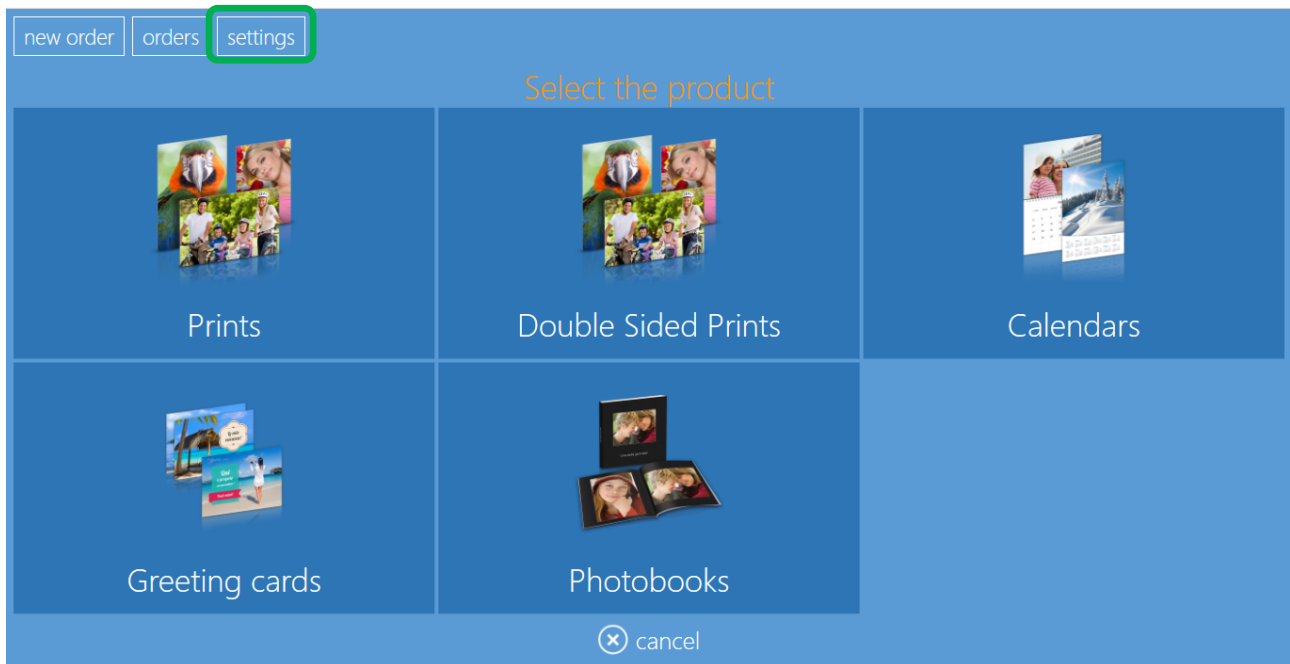

Initial parameters

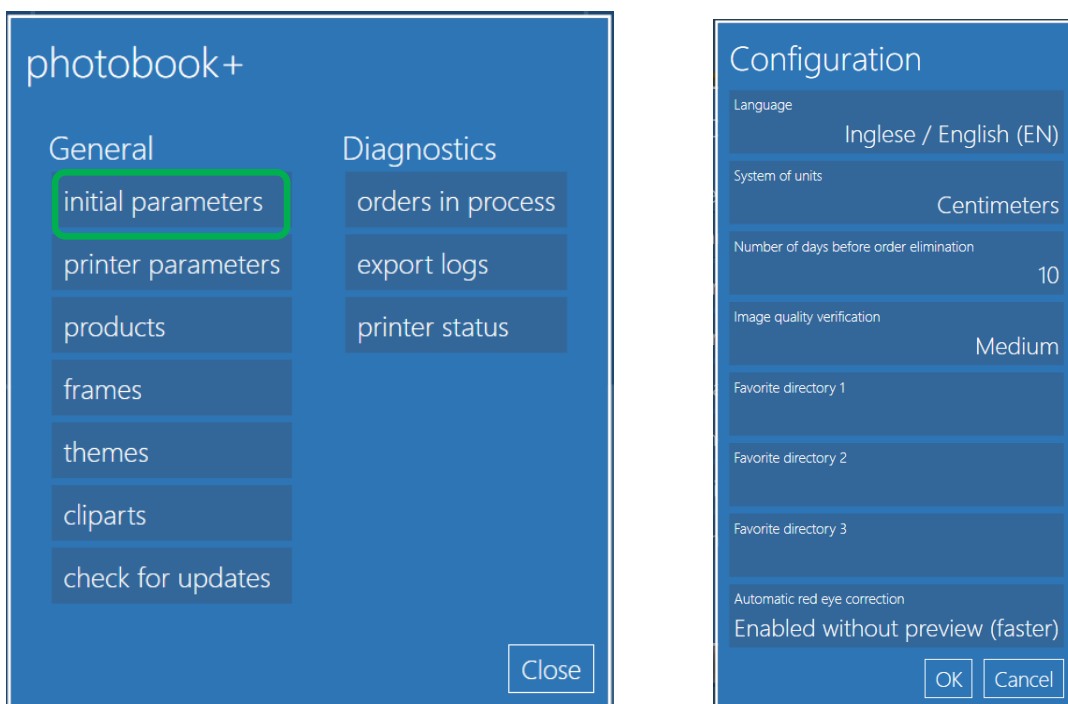

Choose “Settings” > “Initial parameters”.



- ✚ Language: select language to be used as default language. You need to restart the software to have new language in operation.
- ✚ Units: select measuring system units, centimeters or inches
- ✚ Number of days before order elimination: specifies the number of days after which orders already processed is deleted from the system memory.
- ✚ Image quality verification: it specifies level of image resolution below which a warning for low quality is displayed. High means warning when image resolution goes below 300 DPI, Low is warning when resolution goes below 150 DPI.
- ✚ Favourite directory: you can set up to 3 shortcuts to directories from which you will load images
 - Automatic Red Eye Correction (AREC): There are 3 options under Red Eye Correction:
 - Disabled: No automatic red eye correction on all the photos
 - Enabled with preview: Automatic red eye correction will be applied to all the photos, user can see the PREVIEW of corrected photos during the order, but it is slow process because red eye correction process takes time to apply.
 - Enabled without preview: Automatic red eye correction to all the photos, users DON'T see the preview while making an order, the correction is made during the printing process so it is very fast for the user.



Note :

- ✚ By default, Enable without preview option is activated for better image processing with AREC (Automatic Red Eye Correction).

Printer Parameters

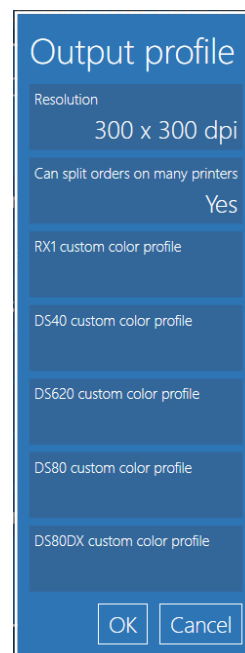
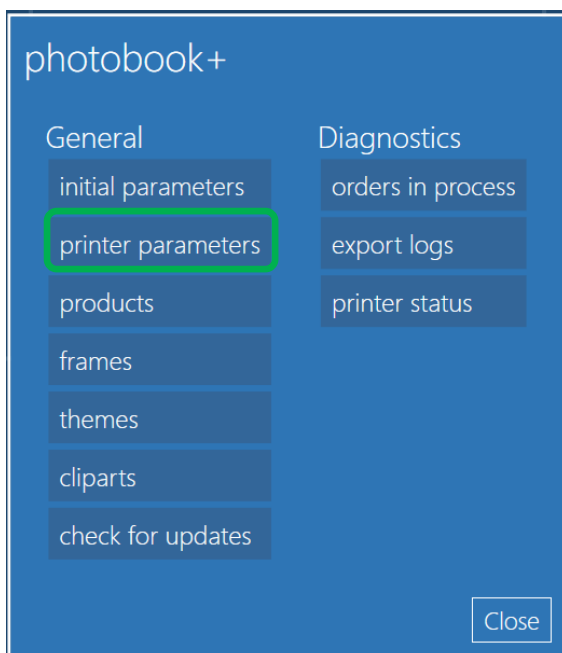


Choose "Settings" > "Printer parameters".

- ✚ Can split orders on many printers: if set to "yes" one order will be sent to all printers able to process that order (an order of 20 prints 4x6 with two DS40 connected and 4x6 media loaded will be split 10 images per printer).
- ✚ Custom color profile: it specifies a color profile to be used by each printer model. If no profile is set then default profile is used.
- ✚ Resolution: Option to choose 300x300 dpi or High Quality printing 300x600 dpi.

Products

Choose “Settings” > “Products” > “edit”

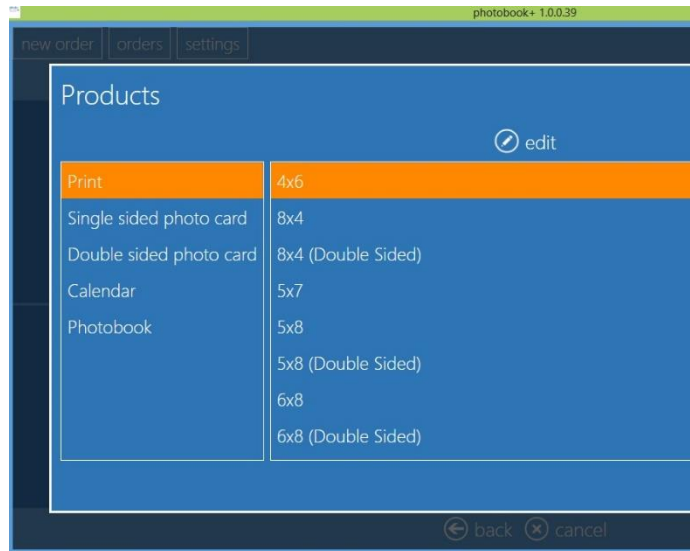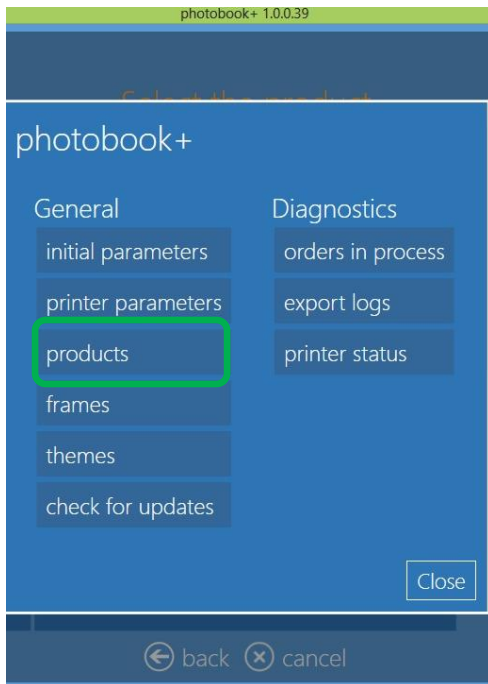

Print: it allows selecting:

- ✚ The user can make each print size visible or not, under this product category.
- ✚ The print formats/sizes will be enabled in the interface based on the printer & its media type.
- ✚ Print surface finish, by default the finish choice is manual so software will prompt page with finish selection during order creation.

Single sided photo card:

- ✚ The user can make it visible of each print size under this product category.
- ✚ In simple terms, it's a single side greeting card exclusively with DS 80 DX Roll Paper.
- ✚ The print formats/sizes will be enabled in the interface based on the printer & media.
- ✚ Print surface finish, by default the finish choice is manual so software will prompt page with finish selection during order creation.
- ✚ The default quantity will be 3 for 4x8 sizes and for 6x8 sizes will be 2 to utilize 100% of the 8x12 Media.
- ✚ If the media size is 8x10 then the quantity will be changed appropriately.
- ✚ The incremental & default quantity variable is always equal.

Double sided photo card:

- ✚ The user can make it visible of each print size under this product category.
- ✚ In simple terms, it's a Double sided greeting card exclusively with DS 80 DX Tray Paper.
- ✚ The print formats/sizes will be enabled based on the printer & media.
- ✚ Print surface finish, by default the finish choice is manual so software will prompt page with finish selection during order creation.
- ✚ The default quantity is 3 for 4x8 & 2 for 6x8 sizes will be 2 to utilize 100% of the 8x12 Media.
- ✚ If the media size is 8x10 then the quantity will be changed appropriately.

- ✚ The incremental & default quantity variable is always equal.

Calendar: it is possible to select:

- ✚ The user can make it visible of the product under the product category.
- ✚ The user can enable/disable to have the cover page for this line of products.
- ✚ This product is available in both Simplex & Dual media types of DS80 DX.
- ✚ Print surface finish, by default the finish choice is manual so software will prompt page with finish selection during order creation.


Photobook:

- ✚ The user can make it visible of each print size under this product category.
- ✚ The user can assign minimum & maximum number of pages (sheets)
- ✚ If the minimum & maximum page is equal, let's say 4 then 1 page of the front side will be assigned for cover page & the rest of the pages will be filled by images.
- ✚ The criteria for the number of page selection (if there is a range of pages) will be assigned by the software means software automatically selects number of pages based on loaded images.
- ✚ Select by user means user will be prompted to select number of pages
- ✚ Print surface finish, by default the finish choice is manual so software will prompt page with finish selection during order creation.
- ✚ Margins of page without images (to allow page trimming)
- ✚ Binding margin: margin without images on binding area to avoid part of images are lost due to binding area
- ✚ Maximum 9 images can be added in each side corresponding to Layout.
- ✚ The user can set Framing adaption to either '*Fit to Layout (Images are cropped)*' or '*Fit to Images (Images are not cropped)*'.

Check for updates

With internet connection

- ✚ The end user can check for latest updates of the software by clicking on the control 'Check for updates'
- ✚ The system should be connected to Internet to check & download updates.

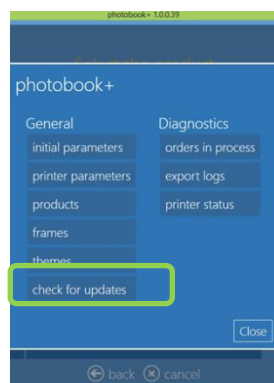

Without internet connection

It is possible to use another way to update the software; by downloading the installer from www.dnpphoto.eu in this section: <http://www.dnpphoto.eu/en/downloads/> and select Photobook+ product.

- i. Exit all applications
- ii. After downloading the software, copy and extract the zip file on the desktop of your computer
- iii. Open the folder, access to the installer
- iv. Double-click on the installer and follow the installation
- v. Click Finish (see image number above 4) and restart your computer.



Warning : Please do not interrupt the installation process during the installation!

Frames

Frames (for print products): allows user to enhance pictures with graphic elements like borders, logos and so on. The file with a frame must be:


- .png with transparent area where the photo will be printed.
- Same size ratio as print format.
- Transparent area may have shade.
- PNG images stored in the computer.

Example of importing a frame with size ratio good for a 6x8 print.


1) Click on frames




2) Click on new

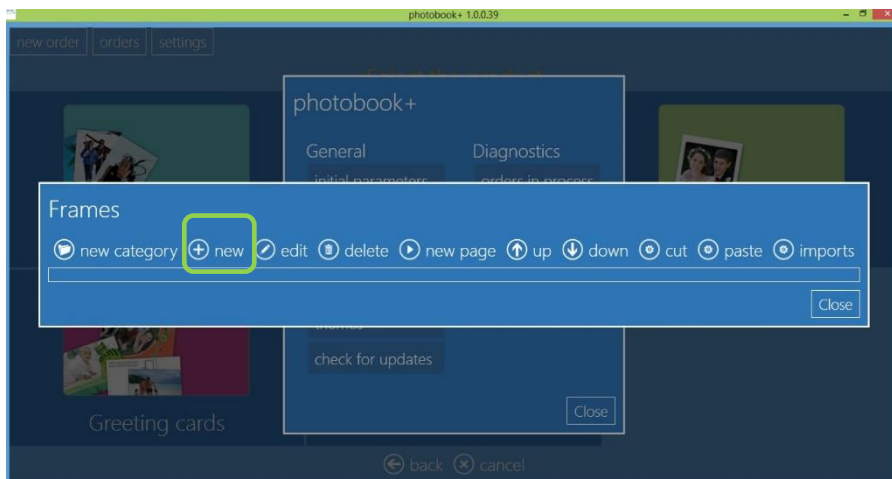


3) Click on Frame

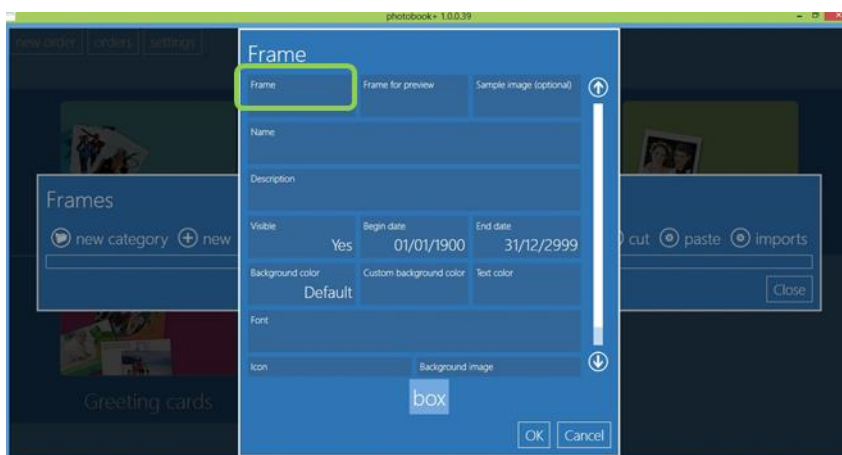

4) Choose "Frame from .png file" and browse for graphic to import

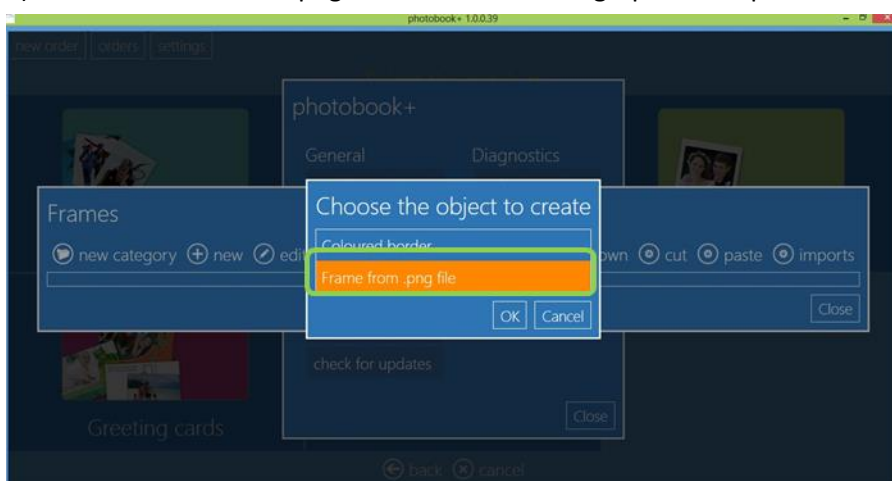


5) Input a name for the graphic

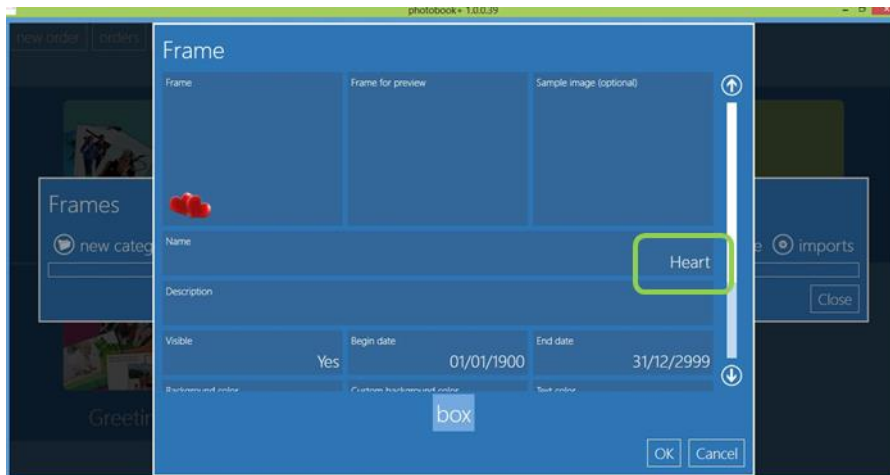

6) Click OK, click on “close” to close all windows and restart the software

7) Frame is now available if you select 6x8 print and select “Change”

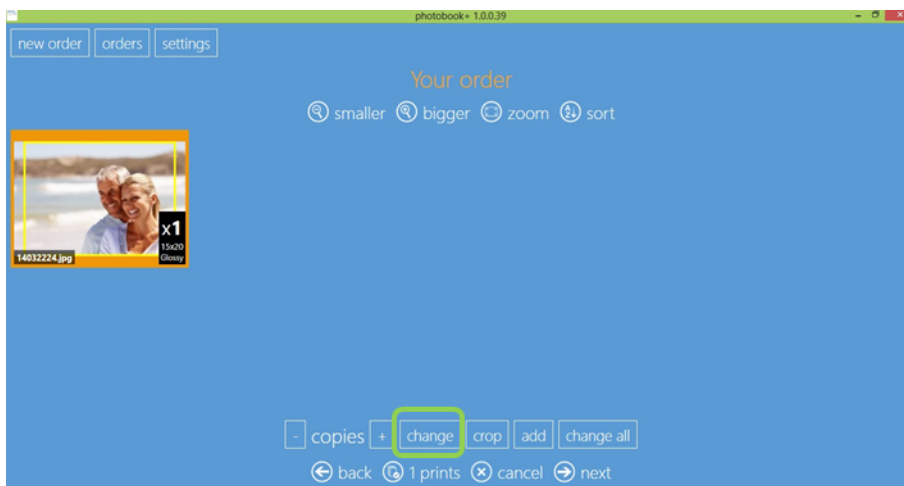

8) Then select “graphics” and select the frame. It will be applied to the current image. If you crop the image the frame will change position accordingly.



Themes

Themes (for creative products): allows user to import backgrounds that will be used to create personalized products.

A theme is a group of backgrounds. Background can be imported from a file or generated choosing a color from a palette.

The file with a background must be:


- .jpg image
- square size ratio is recommended so it will be easily cropped to print format size ratio

For each theme it is possible to set default font for text and size of border to be placed around inserted images (default border size is zero so no border is added to images).


For each background it is possible to select default color for text and default color for image border.

Example of creating a “Materials” theme and inserting “Wood” background into it.


1) Click on themes

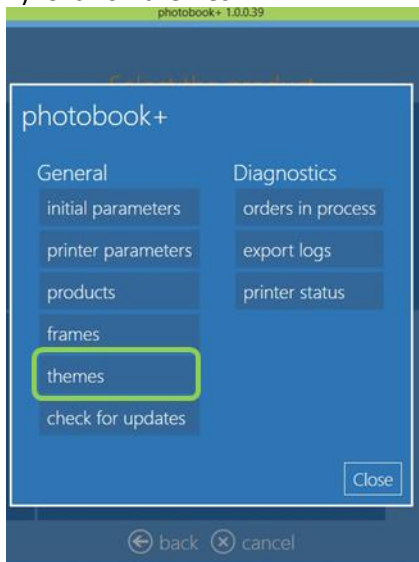


2) Click on new

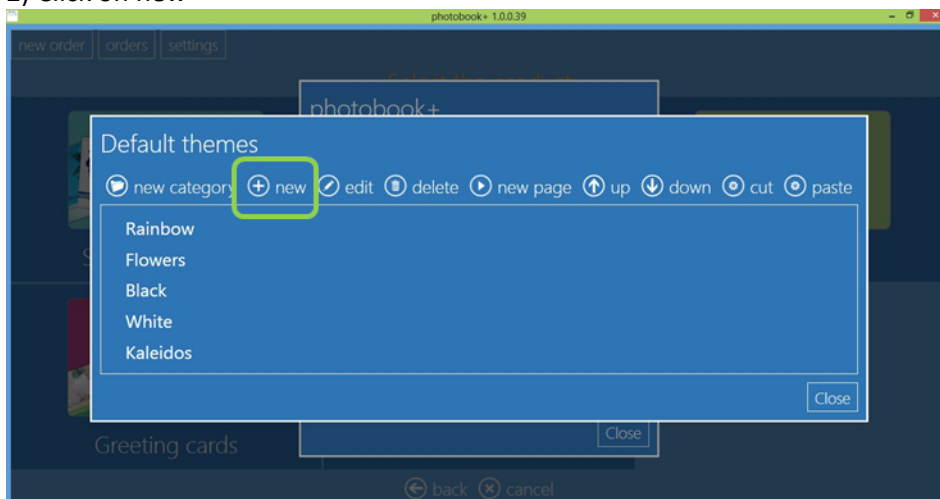


3) Insert name “Materials” and click “backgrounds”

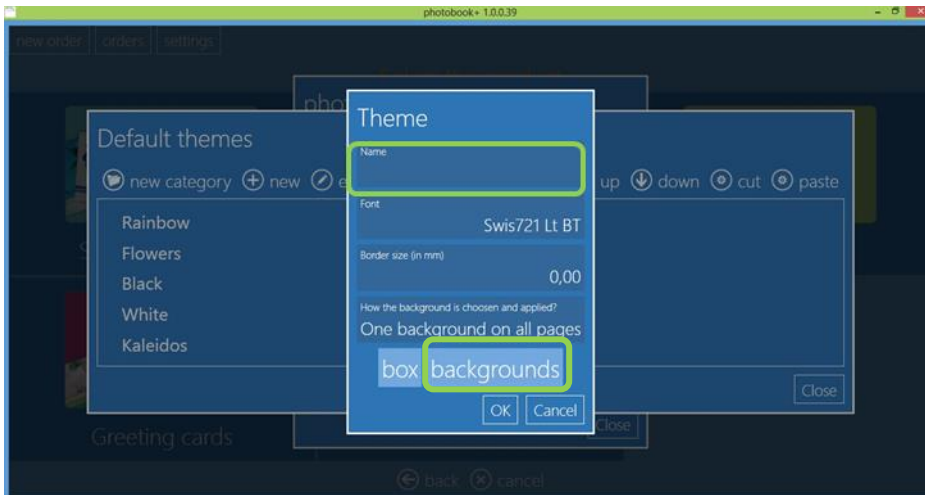


4) Click on image from .jpg file

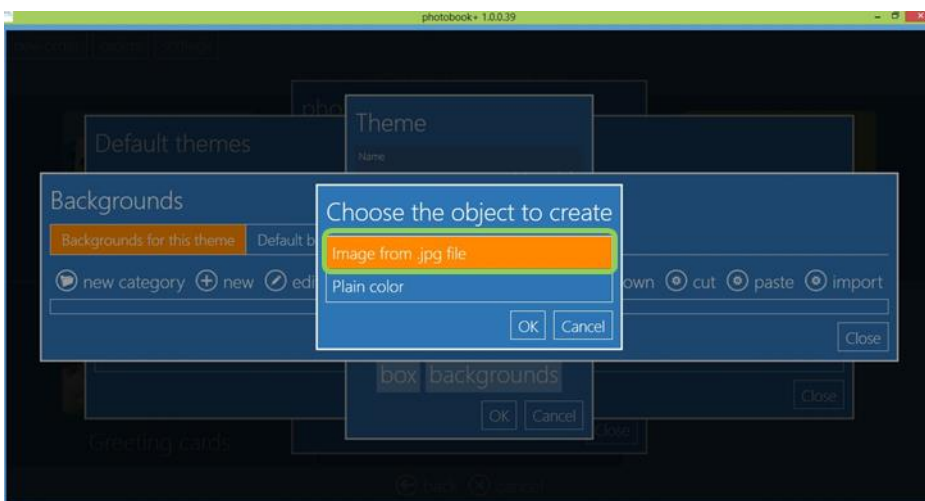

5) Click on “Backgrund image” and browse for graphic to import

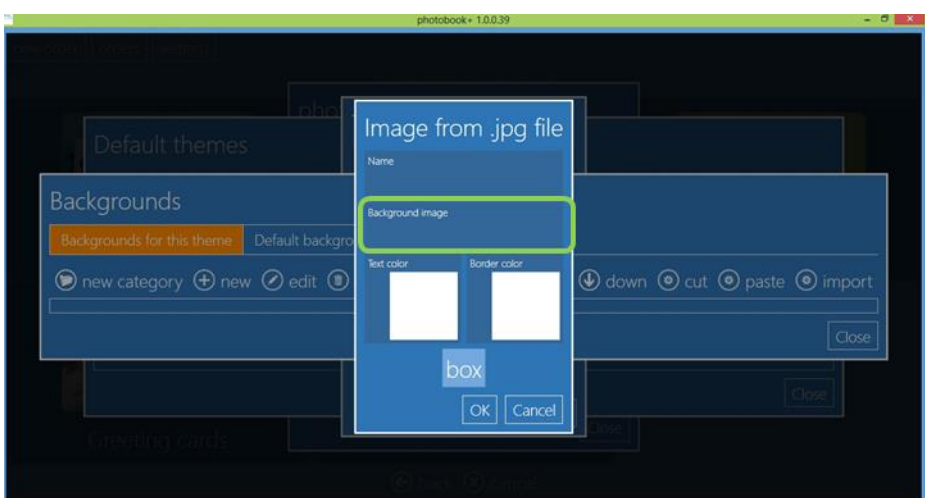


6) Input background name “Wood” and select color for text (black in this example)

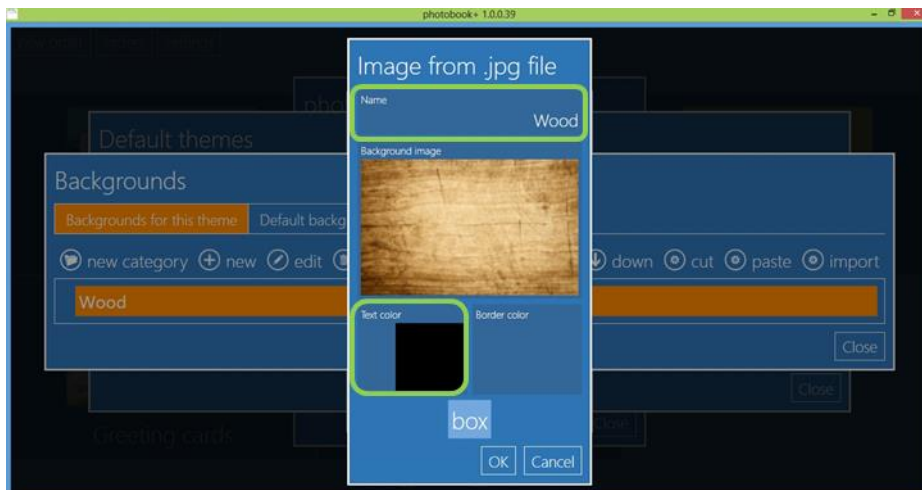

7) Click on OK, close all windows and restart the software. New theme is added to available themes.



Diagnostics

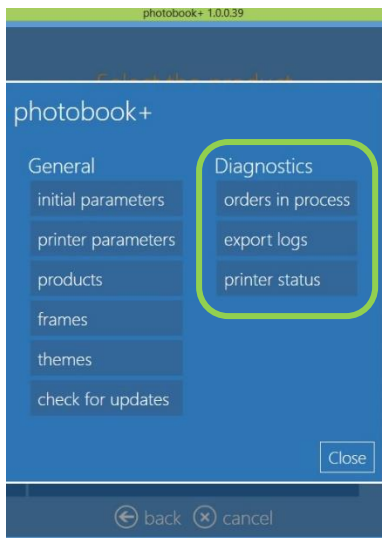

Orders in process

To list the orders that are in process and therefore are not yet printable. All orders with any error condition are listed here.

Choose “Settings” > “Orders in process”.

Following options are available:

Show error: display details about error condition of selected order.


Delete all orders in error: all orders with error condition will be definitely deleted.

Export logs

To create a compressed folder containing log files, useful to report eventual problems with the system.

Choose “Settings” > “Export logs”.

Printer status

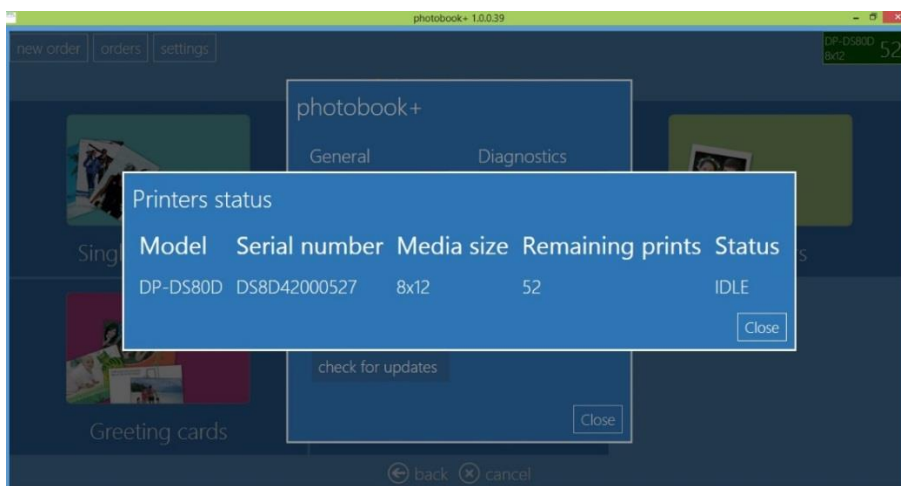

Choose “Settings” > “Printer status”.

It lists the connected printer(s), media loaded, remaining prints, printer status

Examples of printer status:

Printer Status: Idle

DP-DS80D 8x12 110	DS40 4x6 75	DP-DS80D 8x12 110	DS620 15x20 122
----------------------	----------------	----------------------	--------------------

Printer Status: Printing

DP-DS80D PRINTING 110

Printer Status: Disconnected

DP-DS80D 8x12 110

Many Printers

DS40 PRINTING 74	DP-DS80D 8x12 41	DS40 6x8 141
---------------------	---------------------	-----------------

Supported products

Product	Size	Notes
Print Products: Simplex		
Simple Prints	2 x 6	DS620
Simple Prints	3.5 x 5	DS40/DS620
Simple Prints	4 x 4	DS620
Simple Prints	4 x 6	DS40/RX1/ DS620
Simple Prints	(4 x 6)2	DS40/DS620 w 6x8 Media
Simple Prints	4 x 8	DS820
Simple Prints	5 x 5	DS620/RX1
Simple Prints	5 x 7	DS40/RX1/ DS620
Simple Prints	5 x 8	DS820
Simple Prints	6 x 6	DS620/RX1
Simple Prints	6 x 8	DS40/RX1/ DS620
Simple Prints	6 x 9	DS40/DS620
Simple Prints	8 x 8	DS820
Simple Prints	8 x 10	DS80/DS820
Simple Prints	8 x 12	DS80/DS820
Simple Prints	A5	DS820
Simple Prints	A4 x 5	DS820
Simple Prints	A4 x 6	DS820
Simple Prints	A4 x 8	DS820
Simple Prints	A4 x 10	DS820
Simple Prints	A4	DS820

Print Products: Flat Cards 1/2		
Greeting Card Simplex	2 x 6	DS620
Greeting Card Simplex	3.5 x 5	DS620/DS40
Greeting Card Simplex	4 x 4*	DS80/DS620
Greeting Card Double Side	4 x 4	DS80 DX
Greeting Card Simplex	4 x 6*	DS620/RX1
Greeting Card Double Side	4 x 6	DS80 DX
Greeting Card Simplex	4 x 8*	DS80
Greeting Card Double Side	4 x 8	DS80 DX
Greeting Card Simplex	5 x 5	DS620/RX1
Greeting Card Simplex	5 x 7	DS620/RX1
Greeting Card Simplex	5 x 8*	DS80 DX
Greeting Card Double Side	5 x 8	DS80 DX
Greeting Card Simplex	A4 x 5	DS820

Product	Size	Notes
Print Products: DS		
Double Sided Prints	4 x 4	DS80 DX
Double Sided Prints	4 x 6	DS80 DX
Double Sided Prints	4 x 8	DS80 DX
Double Sided Prints	5 x 8	DS80 DX
Double Sided Prints	6 x 8	DS80 DX
Double Sided Prints	8 x 8	DS80 DX
Double Sided Prints	8 x 10	DS80 DX
Double Sided Prints	8 x 12	DS80 DX

Print Products: Panoramic		
Panoramic Prints	6x14	DS620
Panoramic Prints	6x20	DS620
Panoramic Prints	8x18	DS820
Panoramic Prints	8x22	DS820
Panoramic Prints	8x26	DS820
Panoramic Prints	8x32	DS820

Print Products: Flat Cards 2/2		
Greeting Card Simplex	6 x 6	DS620
Greeting Card Simplex	6 x 8	DS40/DS620/RX1
Greeting Card Double Side	6 x 8*	DS80 DX
Greeting Card Simplex	A4 x 6	DS820
Greeting Card Double Side	8 x 8	DS80 DX
Greeting Card Simplex	A5	DS820

Print Products : Calendars		
Calendar 1 Page	8x10	DS820/ DS80 DX
Calendar 2 Pages Duplex	8x10	DS80 DX
Calendar 13 Pages Duplex	8x10	DS80 DX
Calendar 1 Page	8x12	DS820/ DS80 DX
Calendar 2 Pages Duplex	8x12	DS80 DX
Calendar 13 Pages Duplex	8x12	DS80 DX
Calendar 1 Page	A4 x 10	DS820
Calendar 1 Page	A4	DS820

Print Products : PhotoBooks		
Photo Book	4 x 4	DS80 DX
Photo Book L/P	4 x 6	DS80 DX
Photo Book L/P	4 x 8	DS80 DX
Photo Book L/P	8 x 6	DS80 DX
Photo Book	8 x 8	DS80 DX
Photo Book L/P	8 x 10	DS80 DX
Photo Book L/P	8 x 12	DS80 DX

L : Landscape

P : Portrait

*Simplex and duplex with white background

Supported Configurations

Configuration Type 1	Configuration Type 2	Configuration Type 3
DS 80 DX	DS 80 DX with DS 620	2 DS 40
	DS 80 DX with DS RX1	2 DS RX1
	DS 80 DX with DS 80	2 DS 620
	DS 80 DX with DS 40	2 DS 80
	DS 80 DX with DS 820	2 DS820



Note :

Trying different configuration(s) apart from the above may not be supported

Troubleshooting

For any technical issue(s) & question(s), please contact DNP PIE support team at:

support@dnpphoto.eu

❖ *Local immediate print product is not anymore available:*

If you are using DNP printers, the software automatically hides the products which can not be processed. Make sure the printer is powered on, with available media, connected to the PC and ready to print.

❖ *No longer possible upload images from USB devices:*

Check if USB port is damaged, try another USB port.

Verify if any conflicts occur with other USB devices such as, for example, printers not properly installed.